

onset®
HOB0® Data Loggers




PRODUCT CATALOG



1

HOBO MX1101 Temperature Data Logger

Bluetooth Low Energy temperature and relative humidity data logger

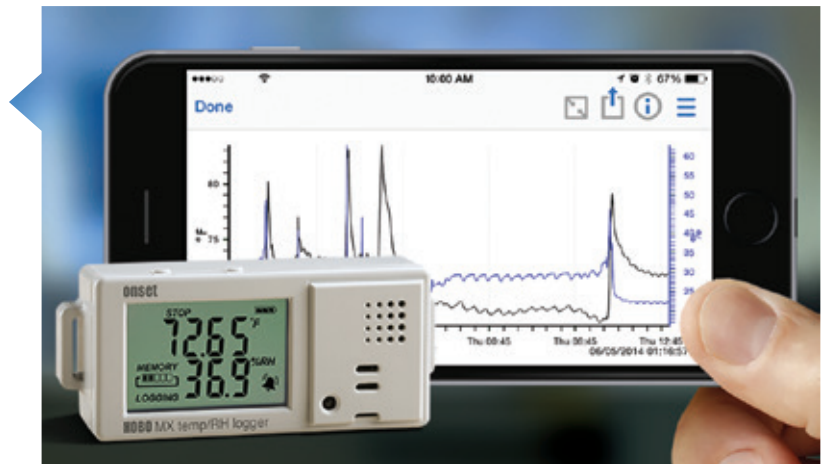

21 Research-grade Weather Station

NEW! The HOBO RX3000 is a research-grade data logging weather station that combines greater measurement flexibility and an on-board LCD display in a rugged, easy-to-deploy package



4 Award-winning HOBO UX90 Series

The industry's lowest-cost, most comprehensive family of "time-of-use" data loggers

32 HOBO U26 Dissolved Oxygen Logger

Affordable, high-performance dissolved oxygen monitoring



2 HOBO MX1102 CO2 data logger

NEW! Bluetooth Low Energy CO₂, temperature and relative humidity data logger



27 HOBO Pendant Loggers

Low-cost data logging solution for temperature, light, and more

29 **NEW!** HOBO MX2001 Bluetooth (BLE) Water Level Logger

The industry's first BLE water level data logger designed for convenient wireless setup and download from mobile devices.



Visit us at onsetscomp.com to browse our full line of HOBO data loggers, shop our online store, and download material from our Data Logger Resources Library.

onsetscomp.com


| Product | Measurements | Page |
|---|--|-------|
| Data Loggers / Indoor Environments | | |
| HOB0 MX1101 Logger | temperature, relative humidity, dew point | 1 |
| HOB0 MX1102 Logger | CO ₂ , temperature, relative humidity, dew point | 2 |
| HOB0 UX100 Loggers | temperature, relative humidity, dew point | 3 |
| HOB0 UX90 Loggers | state, pulse, event, runtime, light on/off, motor on/off, occupancy/light | 4 |
| HOB0 UX120 Plug Load Logger | AC Current, AC Voltage, Amps, Kilowatt Hours, Power Factor, Volt-Amps, Volts, Watt Hours, Watts | 5 |
| HOB0 UX120 4-Channel Analog Logger | temperature, 4-20mA, AC current, AC voltage, air velocity, carbon dioxide, compressed air flow, DC current, DC voltage, gauge pressure, kilowatts, VOC | 6 |
| HOB0 UX120 4-Channel Thermocouple Logger | temperature | 7 |
| HOB0 UX120 4-Channel Pulse Logger | pulse signals, event, runtime, state, AC current, AC voltage, Amp hour, kilowatt hours, kilowatts, motor on/off, power factor, volt-amps, watt hours, watts, volt-amp reactive, volt-Amp reactive hour | 8 |
| HOB0 U12 4-Channel Loggers | temperature, relative humidity, dew point, 4-20mA, AC current, AC voltage, air velocity, carbon dioxide, compressed air flow, DC current, DC voltage, gauge pressure, kilowatts, VOC | 9 |
| HOB0 U12 Stainless Temp Loggers | temperature | 10 |
| HOB0 U14 Loggers | temperature, relative humidity, dew point | 11 |
| Wireless Sensors / Indoor Environments | | |
| HOB0 ZW Series Wireless Sensors | air velocity, AC current, AC voltage, Amp hour, CO ₂ , compressed air flow, DC current, DC voltage, differential pressure, gauge pressure, kilowatt hours, kilowatts, power factor, pulse signals, temperature, relative humidity, dew point, VOC, volt-Amp reactive, volt-Amp reactive hour, volt-Amps, water flow, watt hours, watts, volts, Amps, 0-10 VDC, 4-20mA | 12 |
| Data Logging Systems / Indoor Environments | | |
| HOB0 RX3000 Remote Monitoring Systems | temperature, relative humidity, dew point, CO ₂ , air velocity, VOC, 4-20mA, AC current, AC voltage, Amp hour, Amps, compressed air flow, DC current, DC voltage, differential, pressure, gauge pressure, kW, kWh, power factor, pulse input, volt-Amp reactive, volt-Amp reactive hour, volt-Amps, volts, water flow, watt hours, watts | 13 |
| HOB0 Energy Logger | temperature, relative humidity, dew point, 4-20mA, AC Current, AC voltage, air velocity, Amp hour, carbon dioxide, compressed air flow, DC current, DC voltage, differential pressure, gauge pressure, kilowatt hours, kilowatts, power factor, pulse input, VOC, volt-Amp reactive, volt-Amp reactive hour, volt-Amps, water flow, watt hours, watts, wind | 14 |
| Data Loggers / Weatherproof | | |
| HOB0 Pro v2 Loggers | temperature, relative humidity, dew point | 15 |
| HOB0 RG3 Rain Gauge | rainfall, temperature | 16 |
| HOB0 Pendant Event | temperature, event, rainfall | 17 |
| HOB0 Pendant G | acceleration, tilt, motion | 18 |
| HOB0 U12 Outdoor Industrial | temperature, 4-20mA, 0-2.5 VDC (see HOB0 U12 Industrial data logger (U12-008) at onsetcomp.com) | |
| Data Logging Systems / Weatherproof | | |
| HOB0 Weather Stations | | 19-20 |
| HOB0 RX3000 Weather Station | temperature, relative humidity, dew point, solar radiation, PAR, rainfall, wind speed, wind direction, soil moisture, barometric pressure, leaf wetness, 4-20mA, voltage input, pulse input | 21-22 |
| HOB0 U30-NRC Weather Station | barometric pressure, leaf wetness, light intensity, PAR, pulse input, rainfall, relative humidity, soil moisture, solar radiation, temperature, wind speed & direction, 4-20mA, voltage input | 23 |
| HOB0 Micro Station | temperature, relative humidity, dew point, wind speed, wind direction, rainfall, soil moisture, solar radiation, PAR, barometric pressure, leaf wetness, 4-20mA, voltage input, pulse input, light intensity | 24 |
| Data Loggers / Waterproof | | |
| TidbiT v2 Temp Logger | temperature | 25 |
| HOB0 Water Temp Pro v2 Logger | temperature | 26 |
| HOB0 Pendant Loggers | temperature, light intensity, tilt, acceleration | 27 |
| HOB0 U12 Deep Ocean Temp Logger | temperature | 28 |
| HOB0 Water Level Loggers | water level, barometric pressure, pressure (absolute), differential pressure, temperature | 29-32 |
| HOB0 Conductivity Loggers | conductivity, salinity, temperature | 33 |
| HOB0 Dissolved Oxygen Logger | dissolved oxygen, temperature | 34 |
| Software | | |
| HOB0ware / HOB0ware Pro | | 35 |
| HOB0mobile | | 36 |
| HOB0node Manager | | 37 |
| HOB0link | | 38 |
| External Sensors | | |
| External Sensors by Measurement | | 39-42 |
| Accessories & Communications | | |
| Accessories | | 43-44 |
| Data Shuttles/Base Stations | | 45-46 |

HOBO MX1101 Logger

Bluetooth Low Energy temperature and relative humidity data logger

Onset's HOBO MX1101 is a Bluetooth® Low Energy (BLE) data logger that measures and transmits temperature and relative humidity data wirelessly to mobile devices via BLE technology.

The self-contained wireless data logger, which works with Onset's free HOBOMobile® app for logger setup and data management, enables users to access data anytime from their mobile device over a 100-foot range. It communicates instantly and enables you to "cut the cord" by requiring no dedicated equipment beyond a mobile device for configuring the logger or reading out data. This saves considerable time and money.

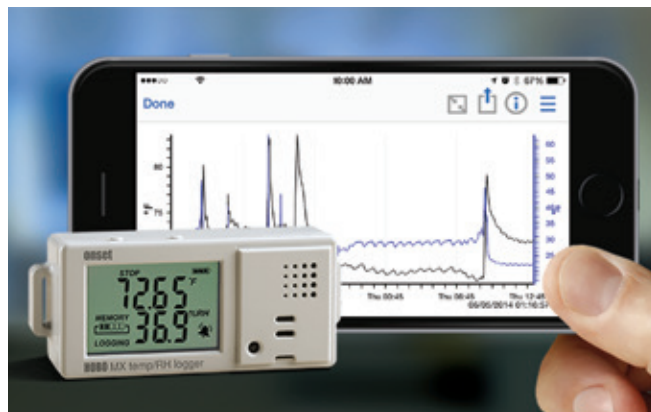

Supported Measurements:

Temperature, Relative Humidity, Dew Point

Key Advantages:

- Bluetooth Low Energy technology for use with mobile devices
- No internet access, cables, or computer required
- Download data any time from 100 ft. away
- Audible and visual alarms keep you notified of problems
- Easily share data and graph images for analysis

Minimum System Requirements:



► For complete information and accessories, please visit: www.onsetcomp.com

| Part number | MX1101 |
|-----------------------------|--|
| Memory | 84,650 Measurements |
| Sampling Rate | 1 second to 18 hours, user selectable |
| Battery Life | 1 year, typical with logging rate of 1 minute and sampling interval of 15 seconds or greater, user replaceable, 2AAA |
| Dimensions | 3.66 x 8.48 x 2.29 cm (1.44 x 3.34 x 0.9 in.) |
| Temperature | |
| Range | -20° to 70°C (-4° to 158°F) |
| Accuracy | ±0.21°C from 0° to 50°C (±0.38°F from 32° to 122°F) |
| Resolution | 0.024°C at 25°C (0.04°F at 77°F) |
| Response Time | 7.30 minutes in air moving 1 m/s (2.2 mph) |
| Relative Humidity | |
| Range | 1% to 95% |
| Accuracy | ±2% from 20% to 80% at 25°C (77°F) |
| Hysteresis | ±2% RH |
| Resolution | 0.01% at 25°C (77°F) |
| Response Time | 20 seconds to 90% in air moving of 1 m/s (2.2 mph) |
| CE compliant | Yes |
| Mobile Device Compatibility | *iOS 8.3, 8.4 & 9.0, or Android 4.4, 5.0, 5.1 and Bluetooth 4.0 or later |
| Bluetooth Compatibility | Bluetooth 4.0 or later (Bluetooth Low Energy, Bluetooth Smart) |

Note: Temp & RH NIST certification services available for this product. Please visit onsetcomp.com, or call us at 1-800-564-4377.

HOBO MX1102 Logger

Bluetooth Low Energy CO₂, temperature and relative humidity data logger

Onset's HOBO MX1102 CO₂ logger makes it more convenient than ever to measure and record CO₂ in buildings and other non-condensing environments. It measures CO₂ from 0 – 5,000 parts per million (ppm) – and our free HOBOMobile app allows you to access data right from your mobile phone or tablet within a 100-foot range.

The MX1102 also features a USB port so it can be used with a computer running HOBOWare Pro graphing and analysis software.

Supported Measurements:

CO₂, Temperature, Relative Humidity, Dew Point

Key Advantages:

- Wireless communication via Bluetooth Low Energy technology
- Six-month battery life at 5-minute CO₂ logging rate
- Easy to deploy and offload using free HOBOMobile App
- Visual and audible high & low alarm thresholds
- Self-calibrating CO₂ sensor technology ensures optimal accuracy at lower maintenance costs



Minimum System Requirements:



HOBOMobile
See pg 36



Mobile device*



► For complete information and accessories, please visit: www.onsetcomp.com

| Part number | MX1102 |
|-----------------------------|--|
| Memory | 84,650 Measurements |
| Logging Rate | 1 second to 18 hours |
| Battery Life | 6 months, typical with logging and sampling intervals of 5 minutes or slower; 6 months or less with logging and sampling intervals faster than 5 minutes while logging CO ₂ , user replaceable, 4AA |
| Dimensions | 7.62 x 12.95 x 4.78 cm (3.0 x 5.1 x 1.88 inches) |
| CO ₂ | |
| Range | 0 to 5,000 ppm |
| Accuracy | ±50 ppm ±5% of reading at 25°C (77°F), less than 70% RH and 1,013 mbar |
| Warm-up Time | 15 seconds |
| Calibration | Auto or manual to 400 ppm |
| Non-linearity | <1% of FS |
| Temperature | |
| Range | 0° to 50°C (32° to 122°F) |
| Accuracy | ±0.21°C from 0° to 50°C (±0.38°F from 32° to 122°F) |
| Resolution | 0.024°C at 25°C (0.04°F at 77°F) |
| Response Time | 12 minutes to 90% in airflow of 1 m/s (2.2 mph) |
| Relative Humidity | |
| Range | 1% to 70% RH when CO ₂ sensor is enabled (non-condensing) 1% to 90% RH when CO ₂ sensor is disabled (non-condensing) |
| Accuracy | ±2% from 20% to 80% typical at 25°C (77°F) |
| Hysteresis | ±2% RH |
| Resolution | 0.01% at 25°C (77°F) |
| Drift | <1% per year typical |
| Response Time | CO ₂ : 1 minute to 90% in airflow of 1 m/s (2.2 mph), Temp: 12 minutes to 90% in airflow of 1 m/s (2.2 mph), RH: 1 minute to 90% in airflow of 1 m/s (2.2 mph) |
| CE compliant | Yes |
| Mobile Device Compatibility | *iOS 8.3, 8.4 & 9.0, or Android 4.4, 5.0, 5.1 and Bluetooth 4.0 or later |
| Bluetooth Compatibility | Bluetooth 4.0 or later (Bluetooth Low Energy, Bluetooth Smart) |

Note: Temp & RH NIST certification services available for this product. Please visit onsetcomp.com, or call us at 1-800-564-4377.

HOBO UX100 Loggers

Next-generation family of temperature and humidity data loggers

The HOBO UX100 Series is Onset's next-generation family of data loggers for tracking temperature and relative humidity in indoor environments.

HOBO UX100 Series offer a dramatic price/performance advantage over competitive products by delivering higher accuracy, larger measurement capacity, and more LCD display features to make environmental data collection faster and easier than ever. The loggers provide a variety of features to reduce deployment time, and offer new logging modes for recording and displaying more detailed data without extensive post-processing or memory use.

Supported Measurements:

Temperature, Relative Humidity, Dew Point



Key Advantages:

- Large memory capacity
- Flexible mounting options
- Visual high & low alarm thresholds
- New Burst and Statistics logging modes
- User-replaceable RH sensors
- Temp, humidity, and thermocouple models available

Minimum System Requirements:



Software
See pg 35



USB cable*

*USB cable included with software
part # BHW-PRO-CD

► For complete information and accessories, please visit: www.onsetcomp.com

| Part number | UX100-001 (Temp) | UX100-003* (Temp/RH) | UX100-011* (Temp/RH) | UX100-023* (Ext Temp/RH) |
|--|---|---|-------------------------|-----------------------------|
| Memory | 84,650 measurements | | | |
| Sampling Rate | 1 second to 18 hours, user-selectable | | | |
| Battery Life | 1 year typical with logging rate of 1 minute and sampling interval of 15 seconds or greater, user-replaceable, CR2032 | | | |
| Dimensions | 3.66 x 5.94 x 1.52 cm (1.44 x 2.34 x 0.6 in.) | 3.66 x 8.48 x 1.52 cm (1.44 x 3.34 x 0.6 in.) | | |
| Temperature | | | | |
| Range | -20° to 70°C (-4° to 158°F) | | | |
| Accuracy | ±0.21°C from 0° to 50°C (±0.38°F from 32° to 122°F) | | | |
| Resolution | 0.024°C at 25°C (0.04°F at 77°F) | | | |
| Response Time (airflow of 1 m/s (2.2mph)) | 8 minutes to 90% | 4 minutes to 90% | | 6 minutes to 90% |
| Relative Humidity | | | | |
| Range | n/a | 15% to 95% | 1% to 95% | |
| Accuracy | n/a | ±3.5% from 25% to 85% | ±2.5% from 10% to 90% | |
| Resolution | n/a | 0.07% at 25°C (77°F) | 0.05% at 25°C (77°F) | |
| Response Time (airflow of 1 m/s (2.2mph)) | n/a | 43 seconds to 90% | 11 seconds to 90% | 5 minutes to 90% |
| CE compliant | Yes | | | |

| Part number | UX100-014M (Thermocouple) | | |
|--|--|--|--------------------|
| Memory | 208,076 measurements | | |
| Sampling Rate | 1 second to 18 hours, user-selectable | | |
| Battery Life | 1 year, typical with logging rate of 1 minute and sampling interval of 15 seconds or greater, user-replaceable, CR2032 | | |
| Dimensions | 3.66 x 8.48 x 1.52 cm (1.44 x 3.34 x 0.6 in.) | | |
| Operating Range | Logging: -20° to 70°C (-4° to 158°F); 0 to 95% RH (non-condensing) | | |
| Thermocouple (probes sold separately) | Range | Accuracy | Resolution |
| Type J | -210° to 760°C (-346° to 1,400°F) | ±0.6°C (±1.08°F) ± thermocouple probe accuracy | 0.03°C (0.06°F) |
| Type K | -260° to 1,370°C (-436° to 2,498°F) | ±0.7°C (±1.26°F) ± thermocouple probe accuracy | 0.04°C (0.07°F) |
| Type T | -260° to 400°C (-436° to 752°F) | ±0.6°C (±1.08°F) ± thermocouple probe accuracy | 0.02°C (0.03°F) |
| Type E | -260° to 950°C (-436° to 1,742°F) | ±0.6°C (±1.08°F) ± thermocouple probe accuracy | 0.03°C at (0.05°F) |
| Type R | -50° to 1,550°C (-58° to 2,822°F) | ±2.2°C (±3.96°F) ± thermocouple probe accuracy | 0.08°C (0.15°F) |
| Type S | -50° to 1,720°C (-58° to 3,128°F) | ±2.2°C (±3.96°F) ± thermocouple probe accuracy | 0.08°C (0.15°F) |
| Type B | 550° to 1,820°C (1,022° to 3,308°F) | ±2.5°C (±4.5°F) ± thermocouple probe accuracy | 0.1°C (0.18F) |
| Type N | -260° to 1,300°C (-436° to 2,372°F) | ±1.0°C (±1.8°F) ± thermocouple probe accuracy | 0.06°C (0.11°F) |

*Note: Temp & RH NIST certification services available for this product. Please visit onsetcomp.com, or call us at 1-800-564-4377.

HOBO UX90 Loggers

Next-generation time-of-use loggers for fast, reliable monitoring

The award-winning HOB0 UX90 Series is the industry's lowest-cost, most comprehensive family of "time-of-use" data loggers. The new toolbox suite includes LCD-display data loggers for measuring motor on/off status, electronic pulses, state changes, and occupancy and light-use patterns.

Leveraging patent-pending technology, HOB0 UX90 data loggers streamline energy audits and make field deployment fast and reliable.

Supported Measurements: State, Pulse, Event, Runtime, Light On/Off, Motor On/Off, Occupancy/Light

Key Advantages:

- LCD displays Time On or % On, providing instant feedback
- Auto-calibration & signal strength indicator ensure proper deployment
- 84k or 346k measurement capacity enables longer deployments
- Rare-earth magnets, 3M Command™ Strips, or mounting tabs for reliable mounting
- Flexible logger Start and Stop options
- HOB0ware Pro allows for easy setup of hundreds of loggers



Minimum System Requirements:



Software
See pg 35



USB cable*

*USB cable included with software part # BHW-PRO-CD

For the most accurate readings, use of Light Pipe UX90-LIGHT-PIPE-1 is recommended to eliminate the effects of ambient light. See page 44 for more details.

► For complete information and accessories, please visit: www.onsetcomp.com

| Part number | UX90-001 (State) | UX90-002 (Light On/Off) | UX90-004 (Motor On/Off) | UX90-005 (Occupancy/Light) | UX90-006 (Occupancy/Light) |
|---|--|---|---|---|--|
| Memory | 84,000 measurements | | | | |
| Part number | UX90-001/M | UX90-002M | UX90-004M | UX90-005M | UX90-006M |
| Memory | 346,000 measurements | | | | |
| INTERNAL SENSOR | | | | | |
| Maximum state, event, runtime frequency | 1 Hz | -- | -- | -- | -- |
| Light threshold | -- | 65 lux | -- | 65 lux | |
| Light type | -- | LED, CFL, fluorescent, HID, incandescent, natural | -- | LED, CFL, fluorescent, HID, incandescent, natural | |
| AC magnetic field threshold | -- | -- | > 40 mGauss at 60 Hz | -- | -- |
| Maximum sensor detection range | -- | -- | -- | 5 m (15.4 ft) | 12 m (39.4 ft) |
| EXTERNAL INPUT | | | | | |
| External contact input | solid state closure or logic driven voltage output | | solid state closure | | -- |
| Maximum state, event, runtime frequency | 1 Hz | -- | 1 Hz | -- | -- |
| Maximum Pulse Frequency | 50 Hz | -- | -- | -- | -- |
| Battery life | 1 year typical, user replaceable, CR2032 | | | | |
| Operating range | -20° to 70°C (-4° to 158°F); 0-95% RH (non-condensing) | | | | |
| Dimensions | 3.66 x 5.94 x 1.52 cm (1.44 x 2.34 x 0.6 in) | | 3.66 x 8.48 x 1.52 cm (1.44 x 3.34 x 0.6 in) | 3.66 x 8.48 x 2.36 cm (1.44 x 3.34 x 0.93 in) | 3.66 x 8.48 x 2.87 cm (1.44 x 3.34 x 1.13 in) |
| CE compliant | Yes | | | | |

HOBO UX120 Plug Load Logger

Measures power and energy consumption of 120V office equipment plug loads

Onset's HOBO Plug Load Logger is a high-accuracy, easy-to-deploy data logger that measures and records the power and energy consumption of 120V plug loads from office equipment, vending machines, and other devices.

The logger provides 0.5% measurement accuracy with a measurement resolution of 1 watt, making it an ideal choice for building audits where detailed energy use data is required. The rugged housing is designed to withstand the rigors of real-world handling, providing reliable performance despite bumps, drops, and use under desks.

Supported Measurements: AC Current, AC Voltage, Amps, Kilowatt Hours, Power Factor, Volt-Amps, Volts, Watt Hours, Watts

Key Advantages:

- 0.5% measurement accuracy enables more reliable plug load energy use data
- "Meter Mode" provides instant viewing of real-time plug load variables
- Large memory enables faster logging intervals for more comprehensive plug load profiles
- Battery back-up ensures logged data remains intact in the event of a power outage or load failure
- Full-featured LCD display provides visual diagnostics for easy deployment
- Factory calibrated (see user's manual for details)

Minimum System Requirements:



Software
See pg 35



USB cable*

► For complete information and accessories, please visit: www.onsetcomp.com

| Part number | UX120-018 |
|--|--|
| RMS Voltage Accuracy, RMS Current Accuracy, Active Power Accuracy, Power Factor Accuracy | 0.5% up to 14 Amp continuous; up to 1.0% over 14 Amp when equipment being monitored is at 100% duty cycle |
| Power Factor Accuracy | ±0.02 |
| Drift | Up to 0.5% typical within 1 year |
| Memory | 4 MB (1.4 million measurements, maximum) |
| Logging rate | 1 second to 18 hours, 12 minutes, 15 seconds |
| Sampling rate | 60 Hz or 16.67 mS single-cycle |
| Battery life | 2 years with line power; 6 months battery only (no line power) with logging rate of 1 minute or greater operating at 25°C (77°F) |
| Power source | Line-powered with 0.92 m (3 ft) AC power cord or two AAA 1.5 V alkaline batteries, user replaceable |
| Resolution | 1 Watt Load at 120 V AC 15 Amp |
| Operating temperature range | Logging: 5° to 40°C (41° to 104°F); 0 to 95% RH (non-condensing) |
| Dimensions | 13.97 x 7.62 x 4.75 cm (5.5 x 3 x 1.87 in.) |
| CE Compliant | Yes |

*USB cable included with software part # BHW-PRO-CD



HOBO UX120 4-Channel Analog Logger

Flexible, accurate, 4-channel analog logger

The HOBO UX120-006M Analog Logger is a high-performance, LCD display data logger for building performance monitoring applications.

As Onset's highest-accuracy data logger, it provides twice the accuracy of previous models, a deployment-friendly LCD, and flexible support up to four external sensors for measuring temperature, current, CO₂, voltage, and more.

Supported Measurements: Temperature, 4-20mA, AC Current, AC Voltage, Air Velocity, Carbon Dioxide, Compressed Air Flow, DC Current, DC Voltage, Gauge Pressure, Kilowatts, Volatile Organic Compound



Key Advantages:

- Twice the accuracy over previous models
- 16-bit resolution
- Flexible support for a wide range of external sensors
- LCD confirms logger operation and displays near real-time measurement data
- Provides minimum, maximum, average, and standard deviation logging options
- On-screen alarms notify you when a sensor reading exceeds set thresholds
- Stores 1.9 million measurements for longer deployments between offloads

Minimum System Requirements:



Software
See pg 35



USB cable*

► For complete information and accessories, please visit: www.onsetcomp.com

| Part number | UX120-006M |
|-----------------|--|
| Memory | 1.9 Million |
| Logging Rate | 1 second to 18 hours, user selectable |
| Logging Modes | Normal, Burst, Statistics |
| Memory Modes | Wrap when full or stop when full |
| Time Accuracy | ±1 minute per month at 25°C (77°F) |
| Battery Life | 1 year typical with logging rate of 1 minute and sampling interval of 15 seconds or greater, user replaceable, 2 AAA |
| Dimensions | 10.8 x 5.41 x 2.54 cm (4.25 x 2.13 x 1 in.) |
| Operating Range | Logging: -20° to 70°C (-4° to 158°F); 0 to 95% RH (non-condensing) |
| Accuracy | ±0.1 mV ±0.1% of reading |
| CE Compliant | Yes |

*USB cable included with software part # BHW-PRO-CD

HOBO UX120 4-Channel Thermocouple Logger

Log type J, K, T, E, R, S, B, or N thermocouples

The HOBO UX120 Thermocouple Logger is a four-channel LCD data logger for measuring and recording temperature in a range of monitoring applications. The logger makes it easy and convenient to record temperatures over a broad range (-260 to 1820° C) and can accept up to four J, K, T, E, R, S, B, or N type probes.

In addition to accepting four thermocouple probes, the logger features an internal temperature sensor for logging ambient temperatures, further extending the application possibilities.

Supported Measurements: Temperature

Key Advantages:

- Easy-to-view LCD display confirms logger operation and battery status
- Near real-time readout of current temperatures as well as minimum, maximum, average, and standard deviation statistics
- On-screen alarms notify you if temperatures exceed high or low thresholds
- Large memory capacity capable of storing 1.6 million measurements
- Start, stop, and restart push buttons
- User-upgradeable firmware



Minimum System Requirements:



Software
See pg 35



USB cable*

Note: for a single thermocouple input logger, please see page 3

► For complete information and accessories, please visit: www.onsetcomp.com

| Part number | UX120-014M | | |
|--|--|--|--------------------|
| Internal Temperature | | | |
| Range | -20° to 70°C (-4° to 158°F) | | |
| Accuracy | ±0.21°C from 0° to 50°C (±0.38°F from 32° to 122°F) | | |
| Resolution | 0.024°C at 25°C (0.04°F at 77°F) | | |
| Drift | <0.1°C (0.18°F) per year | | |
| Logger | | | |
| Logging Rate | 1 second to 18 hours | | |
| Logging Modes | Normal, Burst, Statistics | | |
| Memory Modes | Wrap when full or stop when full | | |
| Time Accuracy | ±1 minute per month at 25°C (77°F) | | |
| Battery Life | 1 year typical with logging rate of 1 minute and sampling interval of 15 seconds or greater, user replaceable, 2 AAA | | |
| Dimensions | 10.8 x 5.41 x 2.54 cm (4.25 x 2.13 x 1 in.) | | |
| Operating Range | Logging: -20° to 70°C (-4° to 158°F); 0 to 95% RH (non-condensing) | | |
| CE Compliant | Yes | | |
| | | | |
| Thermocouple (probes sold separately) | Range | Accuracy | Resolution |
| Type J | -210° to 760°C (-346° to 1,400°F) | ±0.6°C (±1.08°F) ± thermocouple probe accuracy | 0.03°C (0.06°F) |
| Type K | -260° to 1,370°C (-436° to 2,498°F) | ±0.7°C (±1.26°F) ± thermocouple probe accuracy | 0.04°C (0.07°F) |
| Type T | -260° to 400°C (-436° to 752°F) | ±0.6°C (±1.08°F) ± thermocouple probe accuracy | 0.02°C (0.03°F) |
| Type E | -260° to 950°C (-436° to 1,742°F) | ±0.6°C (±1.08°F) ± thermocouple probe accuracy | 0.03°C at (0.05°F) |
| Type R | -50° to 1,550°C (-58° to 2,822°F) | ±2.2°C (±3.96°F) ± thermocouple probe accuracy | 0.08°C (0.15°F) |
| Type S | -50° to 1,720°C (-58° to 3,128°F) | ±2.2°C (±3.96°F) ± thermocouple probe accuracy | 0.08°C (0.15°F) |
| Type B | +60° to 1,820°C (1,022° to 3,308°F) | ±2.5°C (±4.5°F) ± thermocouple probe accuracy | 0.1°C (0.18°F) |
| Type N | -260° to 1,300°C (-436° to 2,372°F) | ±1.0°C (±1.8°F) ± thermocouple probe accuracy | 0.06°C (0.11°F) |

*USB cable included with software part # BHW-PRO-CD

HOBO UX120 4-Channel Pulse Logger

Log pulse signals, events, state changes, and runtimes

The HOBO UX120 4-Channel Pulse data logger is a highly versatile, 4-channel energy data logger that combines the functionality of four separate energy loggers into one compact unit. It enables energy management professionals – from energy auditors to building commissioners – to easily track building energy consumption, equipment runtimes, and water and gas flow rates.

Supported Measurements: Pulse Signals, Event, Runtime, State, AC Current, AC Voltage, Amp Hour, Kilowatt Hours, Kilowatts, Motor On/Off, Power Factor, Volt-Amps, Watt Hours, Watts, Volt-Amp Reactive, Volt-Amp Reactive Hour (sensors sold separately)



Key Advantages:

- Simultaneously measures and records pulse signals, events, state changes, and runtimes
- Stores over 4 million measurements, enabling longer deployments with fewer site visits
- Streamlines deployment via range of start/stop options, logger status LEDs, and high-speed USB 2.0 data offload
- Works with Onset's E50B2 Power & Energy Meter to measure Power Factor, Reactive Power, Watt Hours, and more

Minimum System Requirements:



Software
See pg 35



USB cable*



Sensor
See pg 40

► For complete information and accessories, please visit: www.onsetcomp.com

| Part number | UX120-017 | UX120-017M |
|-------------------------------------|--|------------------------|
| Memory | 520,000 measurements | 4,000,000 measurements |
| Sampling rate | 1 second to 18 hours | |
| Battery life | 1 year typical, user replaceable, 2 AA | |
| External contact Input | Electronic solid state switch closure or logic driven digital signals to 24V | |
| Max pulse frequency | 120 Hz | |
| Max state, event, runtime frequency | 1 Hz | |
| Resolution | Pulse: 1 pulse, Runtime: 1 second, State and Event: 1 state or event | |
| Bits | 4 - 32 bits depending on pulse rate and logging interval | |
| Lockout time | 0 to 1 second in 100 ms steps | |
| Operating temperature range | Logging: -40° to 70°C (-40° to 158°F); 0 to 95% RH (non-condensing) | |
| Dimensions | 11.4 x 6.3 x 3.3 cm (4.5 x 2.5 x 1.3 inches) | |
| CE compliant | Yes | |

*USB cable included with software part # BHW-PRO-CD

HOBO U12 4-Channel Loggers

Multi-channel energy & environmental monitoring

HOBO U12 data loggers provide flexibility for monitoring up to 4 channels of energy and environmental data with a single, compact logger. They provide 12-bit resolution measurements for detecting greater variability in recorded data, direct USB connectivity for convenient, fast data offload, and a 43K measurement capacity.

Supported Measurements: Temperature, Relative Humidity, Dew Point, 4-20mA, AC Current, AC Voltage, Air Velocity, Carbon Dioxide, Compressed Air Flow, DC Current, DC Voltage, Gauge Pressure, Kilowatts, Light Intensity, Volatile Organic Compound (some sensors sold separately)

Key Advantages:

- Records up to 4 channels
- Your choice of 2 models, with flexible measurement options
- Programmable as well as push-button start
- Compatible with a broad range of external sensors

Minimum System Requirements:



Software
See pg 35



USB cable*



► For complete information and accessories, please visit: www.onsetcomp.com

| Part number | U12-012 ¹ (Temp/RH/Light/Ext) | U12-013 ¹ (Temp/RH/2 Ext) |
|---------------------|--|---|
| Memory | 43,000 measurements | |
| Sampling rate | 1 second to 18 hours, user-selectable | |
| Battery life | 1 year typical, user-replaceable, CR2032 | |
| | Temperature | |
| Max range | -20° to 70°C (-4° to 158°F) | |
| Accuracy | ± 0.35°C from 0° to 50°C (± 0.63°F from 32° to 122°F) | |
| Resolution (12-bit) | 0.03°C @ 25°C (0.05°F @ 77°F) | |
| | Relative Humidity | |
| Measurement range | 5% to 95% RH (non-condensing) | |
| Accuracy | ± 2.5% typical, 3.5% maximum, from 10 to 90% RH | |
| Resolution (10-bit) | 0.03% RH | |
| | Light Intensity | |
| | Designed for general purpose indoor measurement of relative light levels | |
| Range | 1 to 3000 footcandles (lumens/ft2) typical 0-32,300 lumens/m2 | |
| | External Input | |
| Range | 0 to 2.5 VDC | |
| Accuracy | ± 2 mV, ± 2.5% of absolute reading | |
| Resolution | 0.6 mV | |
| CE compliant | Yes | |

*USB cable included with software part # BHW-PRO-CD

¹Note: Temp & RH NIST certification services available for this product. Please visit onsetcomp.com, or call us at 1-800-564-4377.

For USB data logging applications in harsh indoor environments, see the 4-channel HOBO U12 Industrial data logger (U12-008) at onsetcomp.com

HOBO U12 Stainless Temp Loggers

High-accuracy temperature monitoring for challenging process conditions

HOBO U12 Stainless Temperature data loggers are ideal for food, pharmaceutical, autoclave, and other applications where high-accuracy temperature data is critical. They can withstand process conditions from pasteurization to flash freezing and washdown.



HOBO U12 Stainless Temperature Logger

Supported Measurements: Temperature

Key Advantages:

- High-accuracy, extended temperature range
- Suitable for high pressure applications to 2200 psi
- Fast readout via direct USB interface

Minimum System Requirements:



Software
See pg 35



USB cable*



HOBO U12 Stainless Temperature Logger with 5-inch Probe

► For complete information and accessories, please visit: www.onsetcomp.com

| Part number | U12-015 | U12-015-02 |
|-----------------|---|--|
| Memory | 43,000 measurements | |
| Battery life | 3 year typical, factory replaceable | |
| Response time | 10 minutes (to 90% in airflow of 1 m/s) 3.5 minutes (to 90% in water) | 2.25 minutes (to 90% in airflow of 1 m/s) 20 seconds (to 90% in water) |
| Operating range | Logging: -40° to 125°C (-40° to 257°F) Launch/readout: 0° to 50°C (32° to 122°F), per USB specification | |
| Range | -40° to 125°C (-40° to 257°F) | |
| Accuracy | ± 0.25°C from 0° to 50°C (± 0.45°F from 32° to 122°F) | Accuracy: ± 0.25°C from 0° to 50°C (± 0.45°F from 32° to 122°F) |
| Resolution | 0.03°C at 25°C (0.05°F at 77°F) | 0.03°C at 25°C (0.05°F at 77°F) |
| Dimensions | 17.5 x 101.6 mm (0.69 x 4.00 in) | Logger: 17.5 x 101.6 mm (0.69 x 4.00 in) Probe: 4 x 124 mm (0.16 x 4.90 in) |
| CE compliant | Yes | |

*USB cable included with software part # BHW-PRO-CD

HOBO U14 Loggers

Display, record, and get notified of temperature and humidity conditions

HOBO U14 data loggers display, record, and provide alarm notifications of temperature and humidity conditions. Receive out-of-range alarm notifications with the optional Auto Dialer, or remote Audible Alarm. These loggers are well-suited for use in manufacturing, processing, and storage environments where reliable monitoring and documentation of specific temperature and relative humidity conditions are critical.


Supported Measurements:

Temperature, Relative Humidity, Dew Point

Key Advantages:

- Real-time display of temperature and relative humidity
- Alarm display and output ensure timely notification of out-of-range conditions
- Optional Remote Alarm and Autodialer
- Choice of two models: Internal Temp/Humidity or External Temp/Humidity sensors
- Optional protective case for harsh or outdoor environments
- Fast data offload via USB

Minimum System Requirements:



► For complete information and accessories, please visit: www.onsetcomp.com

| Part number | U14-001 ² (Temp/RH) | U14-002 ² (Ext Temp/RH)* |
|-------------------|---|---|
| Memory | 43,000 measurements | |
| Sample rate | 1 second to 18 hours, recording times up to 1 year | |
| Battery life | 1 year typical, user-replaceable, 3 AAA alkaline | |
| Range | Temp -20°C to 50°C (-4°F to 122°F) | |
| Accuracy | Temp $\pm 0.2^{\circ}\text{C}$ from 0° to 50°C ($\pm 0.36^{\circ}\text{F}$ from 32° to 122°F) - RH $\pm 2.5\%$ from 10 to 90% | |
| Resolution | 0.03° at 25°C (0.05° at 77°F) | |
| Data channels | 0 | 2 |
| Measurement range | 5% to 95% RH (non-condensing) | |
| Accuracy | $\pm 3.5\%$ RH from 25% to 95% over range of 5° to 55°C (41° to 131°F) | |
| Response time | Internal temp sensor • 15 min (to 90% in airflow of 1 m/sec) | External temp Sensor • 5 min in airflow of 1 m/sec |
| | Internal RH sensor • 2 min (to 90% in airflow of 1 m/sec) | External RH Sensor • 5 min in airflow of 1 m/sec with protective cap |
| Dimensions | 125 x 92 x 31 mm (4.9 x 3.6 x 1.2 in) | |
| CE compliant | Yes | |

*Sensor required for U14-002 only

¹ USB cable included with software part # BHW-PRO-CD

² Note: Temp & RH NIST certification services available for this product. Please visit onsetcomp.com, or call us at 1-800-564-4377.

HOBO ZW Series Wireless Sensors

Monitor and transmit real-time building performance data... wirelessly!

HOBO ZW Series wireless data nodes provide centralized monitoring of energy and environmental conditions in buildings.

Supported Measurements: Air Velocity, AC Current, AC Voltage, Amp Hour, CO₂, Compressed Air Flow, DC Current, DC Voltage, Differential Pressure, Gauge Pressure, Kilowatt Hours, Kilowatts, Power Factor, Pulse Signals, Temperature, Relative Humidity, Dew Point, Volatile Organic Compound, Volt-Amp Reactive, Volt-Amp Reactive Hour, Volt-Amps, Water Flow, Watt Hours, Watts, Volts, Amps, 0-10 VDC, 4-20mA

Key Advantages:

- Provides real-time centralized data collection within a facility
- Scales up to a network of 100 nodes sending data to a single receiver
- Creates self-healing network to overcome obstructions in communication paths
- Provides one year battery life @ 15-minute logging intervals
- Provides alarm notifications via email or text messages
- Features powerful software for organizing and viewing data as well as the wireless network



monitor not included

Minimum System Requirements:



Software
(included)



Receiver



Data node

► For complete information and accessories, please visit: www.onsetcomp.com

| Part number | ZW-RCVR (Receiver) | ZW-001 (Data node) | ZW-003* (Data node) | ZW-005* (Data node) | ZW-006 (Data node) | ZW-007* (Data node) | ZW-008 (Data node) | ZW-ROUTER |
|--------------------------|---|--|--|--|---|---|--|-----------|
| Buffer memory | up to 95k measurements | 5k measurements | 4k measurements | 3k measurements | | | | N/A |
| Measurements | N/A | Temp | Temp/RH | Ext T/RH, 1 analog port 1 pulse input port | 4 external analog ports | Ext T/RH, 2 analog ports | 2 analog ports 2 pulse input ports | N/A |
| Probe size | N/A | N/A | N/A | 1cm (0.38 in) dia. | N/A | 1cm (0.38 in) dia. | N/A | N/A |
| Sample rate | N/A | 1 min to 18 hrs | 1 min to 18 hrs | 1 min to 18 hrs | 1 min to 18 hrs | 1 min to 18 hrs | 1 min to 18 hrs | N/A |
| Transmission rate | N/A | 2 min & greater | 2 min & greater | 2 min & greater | N/A | 2 min & greater | 2 min & greater | N/A |
| Power options (included) | AC adapter, Battery Backup, USB power | | | | | | | |
| Measurement range | N/A | Temp: -40° to 70°C (-40° to 158°F) | Temp: -40° to 70°C (-40° to 158°F) RH: 5 to 95% RH | Temp: -40° to 70°C (-40° to 158°F) RH: 5 to 95% RH VDC Pulse: 0 to 65,535 pulses per logging interval | Analog channels: 0 to 2.5 VDC; 0 to 5 VDC | Temp: -40° to 70°C (-40° to 158°F) RH: 5 to 95% RH | Analog channels: 0 to 2.5 VDC; 0 to 5 VDC | N/A |
| Accuracy | N/A | Temp: ± 0.21°C from 0° to 50°C (± 0.38°F from 32° to 122°F) | Temp: ± 0.21°C from 0° to 50°C (± 0.38°F from 32° to 122°F) RH: ± 2.5% | Temp: ± 0.21°C from 0° to 50°C (± 0.38°F from 32° to 122°F) RH: ± 2.5% Analog: ± 1.544 mV + 2% | Analog: ± 1.544 mV plus 2% of reading | Temp: ± 0.21°C from 0° to 50°C (± 0.38°F from 32° to 122°F) RH: ± 2.5% Analog: ± 1.544 mV + 2% | Analog: ± 1.544 mV plus 2% of reading | N/A |
| Resolution | N/A | Temp: 0.02°C @ 25°C (0.04°F @ 77°F) | Temp: 0.02°C @ 25°C (0.04°F @ 77°F) RH: 0.03% | Temp: 0.02°C @ 25°C (0.04°F @ 77°F) RH: 0.03% Analog channel: 0.6 mV Pulse Channel: 1 pulse | Analog channel: 0.6 mV | Temp: 0.02°C @ 25°C (0.04°F @ 77°F) RH: 0.03% Analog channel: 0.6 mV | Analog channel: 0.6 mV Pulse Channel: 1 pulse | N/A |
| Range | Approx. 100 m (300 ft.) depending on obstructions or interference | | | | | | | |
| Dimensions | 96.5 x 108 x 28 mm (3.8 x 4.25 x 1.1 in) | | | | | | | |
| CE compliant | Yes | | | | | | | |

*Note: Temp & RH NIST certification services available for this product. Please visit onsetcomp.com, or call us at 1-800-564-4377.

NEW! HOBO RX3000 Remote Monitoring System

Real-time access to data from any web browser

The HOBO RX3000 is a research-grade data logging station that combines greater measurement flexibility and an on-board LCD display in a rugged, easy-to-deploy package.

Supported Measurements:

Indoor Environmental: Temperature, Relative Humidity, Dew Point, CO₂, Air Velocity, VOC

Energy/Power: 4-20mA, AC Current, AC Voltage, Amp Hour, Amps, Compressed Air Flow, DC Current, DC Voltage, Differential, Pressure, Gauge Pressure, kW, kWh, Power Factor, Pulse Input, Volt-Amp Reactive, Volt-Amp Reactive Hour, Volt-Amps, Volts, Water Flow, Watt Hours, Watts

Key Advantages:

- Cloud-based data access
- Plug-and-play operation
- Flexible support for a broad range of sensors
- LCD display for easy field deployment
- Alarm notifications via text, email
- Rugged double-weatherproof enclosure

Minimum System Requirements:



Software
See pg 35



Data plan*
See pg 38



Power source¹



Sensor
See pg 39



► For complete information and accessories, please visit: www.onsetcomp.com

| Part number | RX3001-00-01 (ETH) | RX3002-00-01 (WiFi) | RX3003-00-01 (3G) |
|----------------------------|---|---------------------|---|
| Smart Sensor Connectors | 10 (up to 15 data channels; some sensors use more than one data channel) | | |
| Maximum Number of Sensors | 18 (when 2 Analog Modules are configured in the station) | | |
| Smart Sensor Cable Length | 100 m (328 ft) maximum | | |
| Module Slots | 2 (for optional Analog or Relay module; see manual for detailed module specification) | | |
| Fastest Logging Rate | 1 second | 1 second | 1 minute |
| Memory | 32 MB, 2 million measurements | | |
| Alarm notification latency | Logging interval plus 2-4 minutes, typical | | |
| Environmental Rating | Weatherproof enclosure, NEMA 4X | | |
| Operating Range | -40° to 60°C (-40° to 140°F) | | |
| Power | Onset solar panel, AC charger or user-provided external power supply is required | | |
| Battery Life | Typical 3-5 years; 4 Volt, 10 AHr, rechargeable sealed lead-acid | | |
| Size | 18.6 x 18.1 x 11.8 cm (7.3 x 7.1 x 4.7 in.) | | |
| Weight | 2.2 kg (4.85 lb) | | |
| Communications | RJ45/100BaseT | IEEE 802.11 b/g/n | GSM/GPRS/EDGE: Quad band 850/900/1800/1900 MHz, UMTS/HSPA+: Five band 800/850/900/1900/2100 MHz |
| CE Compliant | Yes | | |

*Requires paid data plan

¹AC power adapter or solar panel required. See page 44. For more details, please visit onsetcomp.com, or call us at 1-800-564-4377.

HOBO Energy Logger

Multi-channel energy data logging system

The HOBO Energy Logger multi-channel data logger is a modular, reconfigurable data logging system for energy and industrial monitoring applications.

The 15-channel system enables energy and facility management professionals to quickly and easily solve a broad range of monitoring applications without having to purchase a toolbox full of data loggers.



Supported Measurements: Temperature, Relative Humidity, Dew Point, 4-20mA, AC Current, AC Voltage, Air Velocity, Amp Hour, Carbon Dioxide, Compressed Air Flow, DC Current, DC Voltage, Differential Pressure, Gauge Pressure, Kilowatt Hours, Kilowatts, Power Factor, Pulse Input, Volatile Organic Compound, Volt-Amp Reactive, Volt-Amp Reactive Hour, Volt-Amps, Water Flow, Watt Hours, Watts, Wind

Key Advantages:

- Records up to 15 channels
- Provides 12v excitation for third-party sensors
- Pre-configured Smart Sensors for fast setup
- Signal conditioning modules retain configurations until you change them, providing plug-and-play convenience for commonly used sensors
- Flexible power options include battery operation or AC power adapter
- Works with Onset's E50B2 Power & Energy Meter to measure Power Factor, Reactive Power, Watt Hours, and more

Minimum System Requirements:



Software
See pg 35



Interface
Cable*



Sensor
See pg 39

► For complete information and accessories, please visit: www.onsetcomp.com

| | |
|-------------------|--|
| Part number | H22-001 |
| Memory | 512K nonvolatile flash data storage |
| Operating Range | -20° to 50°C (-4° to 122°F) with alkaline batteries -40° to 60°C (-40° to 140°F) with lithium batteries |
| Sensor Inputs | 6 RJ-12 Smart Sensor jacks plus 3 FlexSmart module slots |
| Communication | RS-232 via 3.5 mm serial port* |
| Logging Interval | 1 second to 18 hours, user-specified interval |
| Sensor Excitation | 12 V DC at 200 mA total, with user-programmable warm up time on a per-channel basis |
| Battery Life | 1 year typical |
| Battery Type | 8 standard AA alkaline batteries (included) |
| External Power | Supports optional 13.6 V DC regulated AC Wall Adapter Connector |
| Time Accuracy | 0 to 2 seconds for the first data point and ± 5 seconds per week at 25°C (77°F) |
| Dimensions | 15.6 cm x 8.4 cm x 4.6 cm (6.13 in x 3.31 in x 1.81 in) |
| CE Compliant | Yes |

*USB to Serial interface cable, part #CABLE-PC-3.5, see page 43

HOBO Pro v2 Loggers

Weatherproof loggers for outdoor temperature and humidity measurements

HOBO Pro v2 data loggers are weatherproof loggers that provide high-accuracy temperature and relative humidity measurements in a wide range of outdoor environments.

Supported Measurements:

Temperature, Relative Humidity, Dew Point

Key Advantages:

- Weatherproof housing for use in outdoor or condensing environments
- High-accuracy measurements
- Replaceable RH sensor provides superior recovery from condensing conditions
- Small-diameter, external sensor versions for measurements in tight spaces
- Optic USB interface for fast and reliable download



Minimum System Requirements:



► For complete information and accessories, please visit: www.onsetcomp.com

| Part number | U23-001 ² (Internal Temp/RH) | U23-002 ² (External Temp/RH) | U23-003 (2x External Temp) | U23-004 (Temp/External Temp) |
|---------------------|---|--|-------------------------------|---------------------------------|
| Memory | 42,000 measurements | | | |
| Sampling rate | 1 second to 18 hours, fixed rate or multiple logging intervals | | | |
| Battery life | 3 years typical, user-replaceable, 1/2 AA lithium | | | |
| Measurement range | Internal Temperature -40° to 70°C (-40° to 158°F) | | | |
| Accuracy | ± 0.21°C over 0° to 50°C (± 0.38°F over 32° to 122°F) | | | |
| Resolution (12-bit) | ± 0.02°@ 25°C (± 0.04°@ 77°F) | | | |
| Stability (drift) | < 0.1°C (0.18°F) per year | | | |
| Measurement range | Relative Humidity (U23-001 & U23-002 only) 0 to 100% RH, -40° to 70°C (-40° to 158°F) | | | |
| Accuracy | ± 2.5% from 10% to 90% RH (typical), to a maximum of ± 3.5% including hysteresis | | | |
| Resolution (12-bit) | 0.03% | | | |
| Measurement Range | External Temperature U23-002: -40° to 70°C (-40° to 158°F), U23-003 & U23-004: -40° to 100°C (-40° to 212°F) with sensor tip and cable immersion in fresh water up to 50°C (122°F) for one year | | | |
| Accuracy | ± 0.21°C from 0° to 50°C (± 0.36°F from 32° to 122°F) | | | |
| Resolution | 0.02°@ 25°C (0.04°@ 77°F) | | | |
| Dimensions | Housing measures 10.2 × 3.8 cm (4.0 × 1.5 in.) | | | |
| CE compliant | Yes | | | |

*HOBO Base Station or HOBO Waterproof Shuttle required. See pages 45-46 for more details.

¹Coupler included with HOBO Base Station or HOBO Waterproof Shuttle.

²Note: Temp & RH NIST certification services available for this product. Please visit onsetcomp.com, or call us at 1-800-564-4377.

HOBO RG3 Rain Gauge

Rainfall data logging system

The HOBO RG3 data logging rain gauge is a self-contained device that includes an integrated data logger with a high-quality tipping-bucket rain gauge. The RG3's logger has a built-in temperature sensor and is on a cable so it can be used in an optional radiation shield for logging air temperature.

Supported Measurements: Rainfall, Temperature

Key Advantages:

- Aluminum housing and 15.4 cm (6.06 in) collector ring
- Field-proven design
- Logger can be moved into an optional radiation shield for logging air temperature
- Three mounting feet to use on flat, level surfaces
- Side bracket for mast mounting (hose clamps included)
- Self-emptying for continuous rainfall logging

Minimum System Requirements:



Software
See pg 35



Base Station*
See pg 46



► For complete information and accessories, please visit: www.onsetcomp.com

| Part numbers | RG3-M, RG3 |
|------------------------------|---|
| Memory | Events only: 16K to 23K events Events and temperature: 25K to 30K data points |
| Measurement range | Up to 320 cm (RG3-M), up to 160 in (RG3) |
| Resolution | 0.2 mm (RG3-M), 0.01 in (RG3) |
| Time stamp resolution | 1 second |
| Maximum Rainfall rate | 12.7 cm (5 in) per hour |
| Battery life | 1 year typical, user-replaceable, CR2032 |
| | Temperature |
| Measurement range | -20° to 70°C (-4° to 158°F) |
| Accuracy | ± 0.53°C from 0° to 50°C (± 0.95°F from 32° to 122°F); a solar radiation shield is required for temperature measurements in sunlight |
| Resolution | 0.14°C at 25°C (0.25°F at 77°F) |
| Sample rate | 1 second to 18 hours, user-selectable |
| Dimensions | 15.2 cm diameter x 25.7 cm high (6 x 10 in) 1.2 kg (2.5 lbs) |
| CE compliant | Yes |

*HOBO Base Station or HOBO Waterproof Shuttle required. See pages 45-46 for more details.

HOBO Pendant® Event

Measures temperature, events and rainfall

The HOBO Pendant Event data logger is ideal for rainfall logging and connects to most standard tipping-bucket rain gauges to determine rainfall rates, times, and duration.

Supported Measurements: Temperature, Event, Rainfall

Key Advantages:

- Records tips or momentary contact closures and temperature
- Event-based data storage provides detailed data and efficient memory usage
- Stores over 16,000 tips (160 inches of rainfall with a 0.01-inch rain gauge)
- Includes scaling to inches, millimeters, or other units

Minimum System Requirements:



Software
See pg 35



Base Station*
See pg 46



► For complete information and accessories, please visit: www.onsetcomp.com

| Part number | UA-003-64 |
|-------------------------|---|
| Memory | Events only: 16K to 23K events Events and temperature: 25K to 30K data points |
| Battery life | 1 year typical, user-replaceable CR2032 |
| | Rain Gauge Tips |
| External Event type: | Relay contact closure or rain gauge "tips" |
| Connection | 2 m (6 ft) cable with 2-wire input |
| Maximum input frequency | 1 Hz (1 pulse per second) |
| | Temperature |
| Measurement range | -20° to 70°C (-4° to 158°F) |
| Accuracy | ± 0.53°C from 0° to 50°C (± 0.95°F from 32° to 122°F); a solar radiation shield is required for temperature measurements in sunlight |
| Resolution | 0.14°C at 25°C (0.25°F at 77°F) |
| Response time | Airflow of 2 m/s (4.4 mph): 10 minutes, typical to 90% |
| Sample rate | 1 second to 18 hours, user-selectable |
| Dimensions | 7.1 x 3.3 x 2.3 cm (2.8 x 1.3 x 0.9 in) Cable 1.8 m (6 ft) |
| CE compliant | Yes |

*HOBO Base Station or HOBO Waterproof Shuttle required. See pages 45-46 for more details.

HOBO Pendant® G

Measures acceleration, tilt, and motion

Measure 3-dimensional motion, such as sports activity or medical therapy compliance with the HOBO Pendant G data logger. With this logger, users can measure acceleration and angular displacement in 1, 2 or 3 axes. Use this data to monitor activity and improve performance.

Supported Measurements: Acceleration, Tilt, Motion

Key Advantages:

- Low-cost acceleration and tilt measurement
- Waterproof housing for wet or underwater use
- Data readout in less than 30 seconds via fast Optic USB interface

Minimum System Requirements:



Software
See pg 35



Base Station*
See pg 46



► For complete information and accessories, please visit: www.onsetcomp.com

| Part number | UA-004-64 |
|--------------------|--|
| Memory | 64K bytes (approximately 21.8K combined x-, y-, and z-axis readings or events) |
| Battery life | 1 year typical, user-replaceable, CR2032 |
| Resolution | 0.025 g; 0.245 m/s ² (0.8 ft/s ²) |
| Logging interval | 1 second to 18 hours, 12minutes, 15 seconds in Normal mode 0.01 seconds (100 Hz) to 0.99 seconds (1.01 Hz) in Fast mode |
| Time accuracy | ±1 minute per month at 25°C (77°F) |
| Operating range | In water/ice: -20° to 50°C (-4° to 122°F) In air: -20° to 70°C (-4° to 158°F) |
| Water depth rating | 30 m from -20° to 20°C (100 ft from -4° to 68°F) |
| Dimensions | 5.8 x 3.3 x 2.3 cm (2.3 x 1.3 x 0.9 in) |
| CE compliant | Yes |

*HOBO Base Station or HOBO Waterproof Shuttle required. See pages 45-46 for more details.

HOBO Weather Stations

Research-grade weather monitoring with plug-and-play convenience

HOBO Weather Stations save you time and money by offering plug-and-play convenience and research-grade performance.



NEW! HOBO RX3000

- 10 Smart Sensor inputs
- Cloud-based data access
- Supports broad range of sensors
- LCD display
- Optional analog sensor & relay modules

[Lean more on page 21-22](#)

HOBO U30-NRC

- 5 or 10 Smart Sensor inputs
- Optional analog sensor port
- Built-in relay
- Supports broad range of sensors

[Lean more on page 23](#)

HOBO H21-002

- 4 Smart Sensor inputs
- Compact, low-cost
- Improved weatherproof enclosure
- Supports broad range of sensors

[Lean more on page 24](#)

2 Meter Tripod

M-TPB

- Height range: 1.72 to 2.13 m (5.6 to 7 ft)
- Mast diameter: 4.1 cm (1.63 in)
- Weight: 5.8 kg (12.8 lbs)

M-GKA Grounding Kit is recommended when using tripods in exposed locations.
2 Meter Tripod Kit also available M-TPB-KIT



3 Meter Tripod

M-TPA (shown at right)

- Height range: 2.74 to 3.20 m (9 to 10.5 ft)
- Mast diameter: 4.1 cm (1.63 in)
- Weight: 12.7 kg (28 lbs)
- Maximum slope: 13 degrees for installation on moderately uneven ground


M-GKA Grounding Kit is recommended when using tripods in exposed locations.




3 Meter Tripod Kit

M-TPA-KIT

- 3-meter tripod (M-TPA)
- 1/2-in Stake Kit (M-SKA) for guy wires
- Grounding Kit (M-GKA)
- Guy Wire Kit (M-GWA)
- Mast Level (M-MLA)

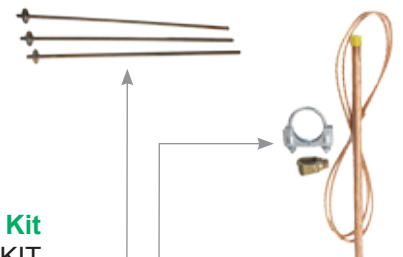


HOBO Weather Stations

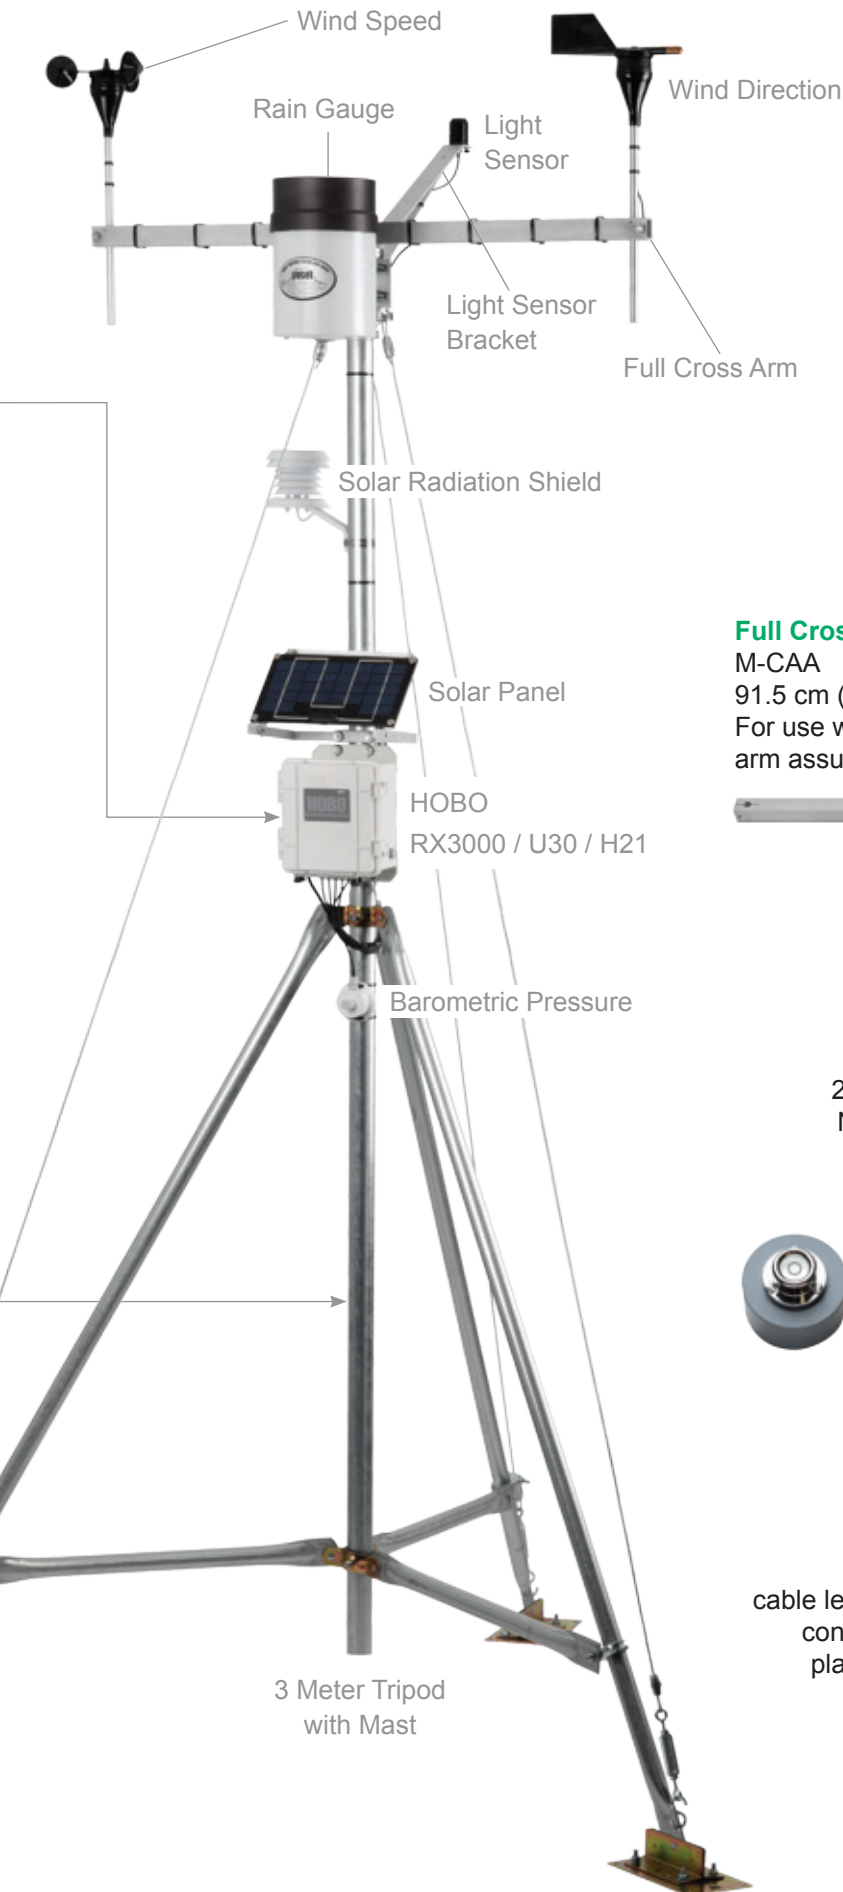

Light Sensor Bracket

M-LBB

Includes leveling screws and u-bolts for mast mounting.



Solar Radiation Shield

RS3

Pre-assembled for S-THBs, S-TMBs, includes clamp for mast mounting.



Full Cross Arm

M-CAA

91.5 cm (36 in)

For use with Onset tripods or masts, the full cross arm assures unobstructed wind measurement.



NDVI Light Sensor Bracket

M-NDVI

Used to mount 2 PAR sensors and 2 solar radiation sensors for making NDVI measurements. Also requires M-LBB light sensor bracket.



Light Sensor Level

M-LLA

Purchase one for use on any number of light sensors.



Smart Sensor Extension Cables

S-EXT-M0xx

2 m, 5 m, 10 m, 25 m

(16 ft, 33 ft, 82 ft)

cable lengths available. Use individually or connected together to optimize sensor placement. A weatherproof housing is required for outdoor connections (Part# S-EXT-CASE2).

Network cable length limited to 100 meters per data logger.



3 Meter Tripod
with Mast

NEW! HOBO RX3000 Remote Weather Station

Research-grade weather monitoring with plug-and-play convenience

The HOBO RX3000 is a research-grade data logging weather station that combines greater measurement flexibility and an on-board LCD display in a rugged, easy-to-deploy package.

Key Advantages:

- Cloud-based data access
- Plug-and-play operation
- Flexible support for a broad range of sensors
- LCD display for easy field deployment
- Alarm notifications via text, email
- Rugged double-weatherproof enclosure

Supported Measurements: Temperature, Relative Humidity, Dew Point, Solar Radiation, PAR, Rainfall, Wind Speed, Wind Direction, Soil Moisture, Barometric Pressure, Leaf Wetness, 4-20mA, Voltage Input, Pulse Input



Minimum System Requirements:



Software
See pg 35



Data plan*



Power
source¹




Sensor
See pg 39

Confirm signal strength
at the site

Receive immediate
notification of sensor or
system problems

Connect with HOBOLink
to upload configuration
changes and latest
readings

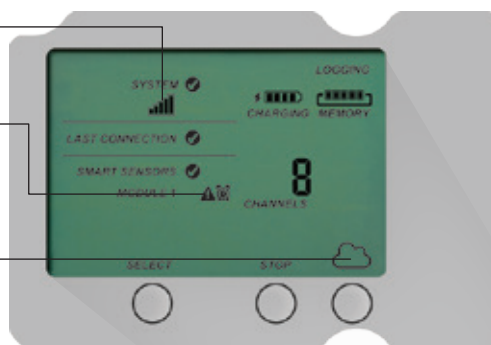

Deployment Friendly

On-board LCD display helps you confirm system operation, sensor connections, cellular signal strength and other parameters before leaving the deployment site.

Wide range of measurements

The measurement possibilities are nearly endless with the RX3000 Station. You can configure up to 15 channels of plug-and-play Smart Sensors, and add modules for up to 8 analog sensors.

And, the station can power external sensors requiring 12-volt excitation power, extending the range of possible measurements.




*Requires paid data plan

HOBO RX3000 Remote Weather Station

Reliable, field-proven performance

The HOBO RX3000 features a field-proven, double-weatherproof enclosure designed for long-term use – even in the harshest environments. Critical system electronics are sealed in the unit's secondary enclosure, and weathertight sensor cable seal keeps moisture out.

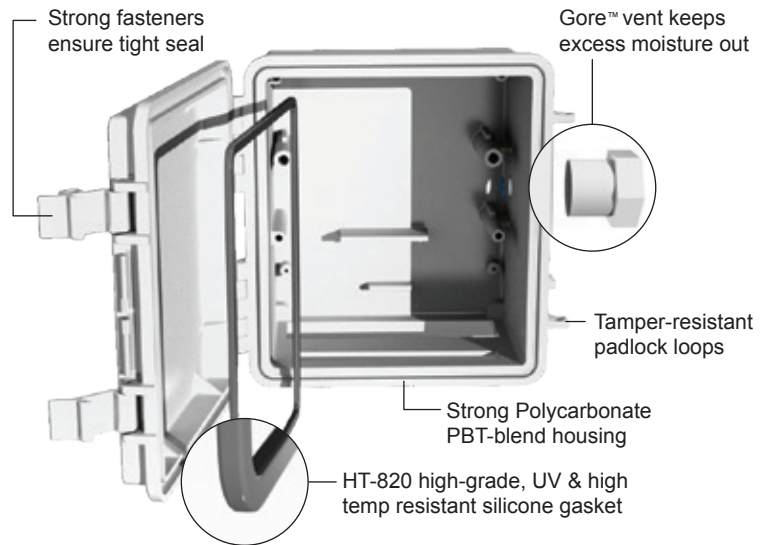

Convenient plug-and-play operation

Simply plug in a Smart Sensor and the RX3000 Station will recognize it and begin taking measurements. No need for programming or complicated wiring!

| Part number | RX3001-00-01 (ETH) | RX3002-00-01 (WiFi) | RX3003-00-01 (3G) |
|----------------------------|---|---------------------|---|
| Smart Sensor Connectors | 10 (up to 15 data channels; some sensors use more than one data channel) | | |
| Maximum Number of Sensors | 18 (when 2 Analog Modules are configured in the station) | | |
| Smart Sensor Cable Length | 100 m (328 ft) maximum | | |
| Module Slots | 2 (for optional Analog or Relay module; see manual for detailed module specification) | | |
| Fastest Logging Rate | 1 second | 1 second | 1 minute |
| Memory | 32 MB, 2 million measurements | | |
| Alarm notification latency | Logging interval plus 2-4 minutes, typical | | |
| Environmental Rating | Weatherproof enclosure, NEMA 4X | | |
| Operating Range | -40° to 60°C (-40° to 140°F) | | |
| Power | Onset solar panel, AC charger or user-provided external power supply is required | | |
| Battery Life | Typical 3-5 years; 4 Volt, 10 AHr, rechargeable sealed lead-acid | | |
| Size | 18.6 x 18.1 x 11.8 cm (7.3 x 7.1 x 4.7 in.) | | |
| Weight | 2.2 kg (4.85 lb) | | |
| Communications | RJ45/100BaseT | IEEE 802.11 b/g/n | GSM/GPRS/EDGE: Quad band 850/900/1800/1900 MHz, UMTS/HSPA+: Five band 800/850/900/1900/2100 MHz |
| CE Compliant | Yes | | |

¹AC power adapter or solar panel required. See page 44. For more details, please visit onsetcomp.com, or call us at 1-800-564-4377.

HOBO U30-NRC Weather Station

Research-grade data logging weather station

This rugged weather station is one of Onset's most durable outdoor environmental monitoring solutions. Users can easily configure the HOBO U30-NRC Weather Station to fit their application needs. Use up to 15 channels to collect environmental data and then upload to HOBOWare Pro software for expert analysis.


Supported Measurements: Barometric Pressure, Leaf Wetness, Light Intensity, PAR, Pulse Input, Rainfall, Relative Humidity, Soil Moisture, Solar Radiation, Temperature, Wind Speed & Direction, 4-20mA, Voltage Input

Key Advantages:

- Rugged double-weatherproof, tamper-proof enclosure
- Setup is quick and easy with plug-and-play sensors
- Fast data offload via USB
- Optional analog inputs with sensor excitation
- Includes relay that can be activated on user-defined alarm conditions



Minimum System Requirements:



► For complete information and accessories, please visit: www.onsetcomp.com

| Part number | U30-NRC |
|---------------------------|--|
| Smart-Sensor Inputs | 5 or 10 |
| Data Channels | Maximum of 15 (some sensors use more than one data channel) |
| Smart Sensor Cable Length | 100m (323ft) maximum |
| Alarm Relay | Can be activated, deactivated or pulsed on user-defined sensor alarms. |
| Logging Interval | 1 minute to 18 hours, user-specified |
| Data Storage Memory | 512K bytes local storage in non-volatile flash memory |
| Environmental Rating | Weatherproof enclosure, NEMA 4x |
| Operating Range | -40 to 60°C (-40 to 140°F) see battery life |
| Power | An Onset solar panel (3w, or 6w) or AC adapter is required |
| Battery Life | 3-5 years, 4 volt 10 AHr rechargeable sealed lead acid |
| Dimensions | 17.8 x 11.7 x 19.3 cm (7.0 x 4.6 x 7.6 in) |
| Weight | 2kg (4lbs 10oz) |
| Local Communication | USB |
| CE Compliant | Yes |

HOBO Micro Station

4-channel weatherproof station for monitoring outdoor environmental conditions

The HOBO Micro Station offers reliable monitoring performance at industry-leading prices. Designed for stand-alone data logging applications, the 4-channel HOBO Micro Station accepts Onset's full suite of plug-and-play Smart Sensors, and is battery-powered for up to one year.

Supported Measurements: Temperature, Relative Humidity, Dew Point, Wind Speed, Wind Direction, Rainfall, Soil Moisture, Solar Radiation, PAR, Barometric Pressure, Leaf Wetness, 4-20mA, Voltage Input, Pulse Input, Light Intensity

Key Advantages:

- Improved weatherproof enclosure for harsh environments
- Compact and low cost, with 4 sensor inputs
- Up to 2 DC voltage or 4-20mA input adapters

Minimum System Requirements:



Software
See pg 35



Interface
Cable*



Sensor
See pg 39



► For complete information and accessories, please visit: www.onsetcomp.com

| Part number | H21-002 |
|------------------|---|
| Memory | 512K non-volatile flash data storage |
| Operating Range | -20° to 50°C (-4° to 122°F) with alkaline batteries, -40° to 70°C (-40° to 158°F) with lithium batteries |
| Sensor Inputs | Up to four Smart Sensors (including multiple-parameter sensors) |
| Communication | RS-232 via 3.5 mm serial port |
| Logging Interval | 1 second to 18 hours, user-specified interval |
| Time Accuracy | 0 to 2 seconds for the first data point and ± 5 seconds per week at 25°C (77°F) |
| Battery Life | 1 year typical, up to 10 sensors w/10 minute or longer logging interval, 4 AA alkaline batteries (included) |
| Dimensions | 8.9 cm H x 11.4 cm D x 5.4 cm W (3.5 x 4.5 x 2.125 in) |
| CE Compliant | Yes |

*USB interface cable. See page 43

TidbiT[®] v2 Temp Logger

Small, durable logger for measuring water temperature

Onset's smallest data logger, the TidbiT v2, has 12-bit resolution and a precision sensor for $\pm 0.2^{\circ}\text{C}$ accuracy over a wide temperature range. It is waterproof to 300 meters (1,000 feet) and can be used in a wide range of water temperature monitoring applications.

Supported Measurements: Temperature

Key Advantages:

- Onset's smallest temperature logger
- Waterproof to 300 meters (1,000 feet)
- Data readout in less than 30 seconds via fast optic USB interface



Minimum System Requirements:



Software
See pg 35



Base Station*
See pg 45



Coupler[†]

► For complete information and accessories, please visit: www.onsetcomp.com

| Part number | UTBI-001 |
|---------------------------|---|
| Temperature Sensor | |
| Operation range | -20° to 70°C (-4° to 158°F) in air; maximum sustained temperature of 30°C (86°F) in water** |
| Accuracy | $\pm 0.21^{\circ}\text{C}$ over 0° to 50°C ($\pm 0.38^{\circ}\text{F}$ over 32° to 122°F) |
| Resolution | 0.02°C at 25°C (0.04°F at 77°F) |
| Response time | 5 minutes in water; 12 minutes in air moving 2 m/sec; 20 minutes in air moving 1 m/sec (typical to 90%) |
| Stability (drift) | 0.1°C (0.18°F) per year |
| Logger | |
| Real-time clock | ± 1 minute per month 0° to 50°C (32° to 122°F) |
| Battery | 3 Volt lithium, non-replaceable |
| Battery life | 5 years with 1 minute or greater logging interval |
| Memory | 42,000 measurements |
| Waterproof | To 305 m (1,000 ft) |
| Dimensions | 3.0 × 4.1 × 1.7 cm (1.2 × 1.6 × 0.68 in); mounting bail 4.6 mm (3/16 in) diameter hole |
| CE compliant | Yes |

*HOBO Base Station or HOBO Waterproof Shuttle required. See pages 45-46 for more details.

[†]Coupler included with HOBO Base Station or HOBO Waterproof Shuttle.

**To guarantee accuracy, the TidbiT v2 Temp must not be used in condensing environments and water temperatures higher than 30°C (86°F) for more than eight cumulative weeks over the life of the logger. Frequent or prolonged exposure will lead to measurement drift and eventual failure.

HOBO Water Temp Pro v2 Logger

Affordable temperature monitoring for fresh or salt water

The HOBO Water Temp Pro v2 data logger features 12-bit resolution and a precision sensor for $\pm 0.2^{\circ}\text{C}$ accuracy over a wide temperature range. Designed with a durable streamlined case for extended deployment in fresh or salt water, the Water Temp Pro v2 is equipped with an Optic USB interface for data offload in the field, even when the data logger is wet.

Supported Measurements: Temperature

Key Advantages:

- Research-grade measurements at an affordable price
- Waterproof to 120 meters (400 feet)
- Data readout in less than 30 seconds via fast Optic USB interface

Minimum System Requirements:



Software
See pg 35



Base Station*
See pg 45



Coupler¹



► For complete information and accessories, please visit: www.onsetcomp.com

| Part number | U22-001 |
|-------------------|--|
| Memory | 42,000 measurements |
| Logging interval | 1 second to 18 hours, fixed - or multiple-rate up to 8 user-defined sampling intervals |
| Battery life | 6 years with 1 minute or greater logging interval, factory-replaceable ONLY |
| Measurement range | -40° to 70°C (-40° to 158°F) in air; maximum sustained temperature of 50°C (122°F) in water |
| Accuracy | $\pm 0.21^{\circ}\text{C}$ over 0° to 50°C ($\pm 0.38^{\circ}\text{F}$ over 32° to 122°F) |
| Resolution | 0.02°C at 25°C (0.04°F at 77°F) |
| Response time | (90%) 5 minutes in water; 12 minutes in air moving 2 m/sec (typical) |
| Dimensions | 3.0 cm (1.19 in) maximum diameter, 11.4 cm (4.5 in) length; mounting hole 6.3 mm (0.25 in) dia |
| CE compliant | Yes |

*HOBO Base Station or HOBO Waterproof Shuttle required. See pages 45-46 for more details.

¹Coupler included with HOBO Base Station or HOBO Waterproof Shuttle.

HOBO Pendant Loggers

Low-cost data logging solution for temperature, light, and more

HOBO Pendant data loggers are economical, weatherproof, and waterproof temperature data loggers designed for a variety of short- and long-term monitoring applications.

Supported Measurements: Temperature, Light Intensity, Tilt, Acceleration

Key Advantages:

- Low-cost temperature, light intensity, and acceleration loggers
- Waterproof housing for wet or underwater use
- Data readout in less than 30 seconds via Optic USB interface



Minimum System Requirements:



Software
See pg 35



Base Station*
See pg 46

► For complete information and accessories, please visit: www.onsetcomp.com

| Part number | UA-001-08 | UA-001-64 | UA-002-08 | UA-002-64 | UA-004-64 ¹ |
|-----------------------|--|-------------|--------------------|---------------------|--|
| Memory (measurements) | 6,500 temp | 52,000 temp | 3,500 temp & light | 28,000 temp & light | 64,000 accel 32,000 tilt 21,333 motion |
| Sample rate | 1 second to 18 hours, user-selectable | | | | 100 per second |
| Battery life | 1 year typical, user-replaceable, CR2032 | | | | |
| Water Depth Rating | 30 m from -20 to 20°C (100 ft from -4° to 68°F) | | | | |
| | Temperature | | | | |
| Measurement range | -20° to 70°C (-4° to 158°F) in air, -20° to 50°C (-4° to 122°F) in water | | | | |
| Accuracy | ± 0.53°C from 0° to 50°C (± 0.95°F from 32° to 122°F) | | | | |
| Resolution (10-bit) | 0.14°C @ 25°C (0.25°F @ 77°F) | | | | |
| Response time | 10 minutes (to 90% in airflow of 2 m/s), 5 minutes (to 90% in water) | | | | |
| | Light intensity | | | | |
| Range | 0-323,000 lumens/m2 [0-30,000 foot candles (lumens/ft2)] | | | | |
| | Acceleration | | | | |
| Measurement range | ± 3 G | | | | |
| Accuracy | ±2.5% FS @ 25°C (77°F)—Factory-calibrated | | | | |
| Resolution (8-bit) | 0.02 G | | | | |
| | Tilt/Motion | | | | |
| Measurement range | ± 3 G | | | | |
| Accuracy | ±2.5% FS @ 25°C (77°F)—Factory-calibrated | | | | |
| Resolution (8-bit) | ±4.3° @ 90° to ±13° @ 0° and 180° | | | | |
| Dimensions | 5.8 x 3.3 x 2.3 cm (2.3 x 1.3 x 0.9 in) | | | | |
| CE compliant | Yes | | | | |

*HOBO Base Station or HOBO Waterproof Shuttle required. See pages 45-46 for more details.

¹For more details, see page 18

HOBO U12 Deep Ocean Temp Logger

Water temperature monitoring in extreme ocean environments

The HOBO U12 Deep Ocean Temperature data logger is designed to track water temperatures in the most extreme ocean environments. Built with a virtually indestructible titanium housing, the logger can withstand corrosive salt water and exposure to extreme temperature and pressure at depths of up to 11,000 meters.

Supported Measurements: Temperature

Key Advantages:

- Withstands depths up to 11,000 meters (36,080 feet)
- Extended temperature range: -40° to 125°C
- Fast readout via direct USB interface
- Titanium housing for use in saltwater

Minimum System Requirements:



Software
See pg 35



USB cable*



► For complete information and accessories, please visit: www.onsetcomp.com

| Part number | U12-015-03 |
|---------------------|--|
| Memory | 43,000 measurements |
| Sample rate | 1 second to 18 hours, user-selectable |
| Battery life | 3 years typical, factory-replaceable |
| Measurement range | Logging: -40° to 125°C (-40° to 257°F) Launch/Readout: 0° to 50°C (32° to 122°F), per USB specification |
| Accuracy | ± 0.25°C from 0° to 50°C (± 0.45°F from 32° to 122°F) |
| Resolution (12 bit) | 0.02°@ 25°C (0.04°@ 77°F) |
| Response time | <4 minutes (to 90% in water) |
| Dimensions | 114 x 20.6 mm diameter (4.5 x 0.81 in diameter) 6.4 mm (0.25 in) mounting hole |
| CE compliant | Yes |

*USB cable included with software part # BHW-PRO-CD

New! HOBO MX2001 Water Level Logger

Wireless access to water level and temperature data via Bluetooth Low Energy (BLE)

Onset's HOBO MX2001 is the industry's first water level data logger designed for convenient wireless setup and download from mobile devices via Bluetooth Low Energy (BLE) technology. The logger dramatically simplifies and lowers the cost of field data collection by providing wireless access to high-accuracy water level and temperature measurements right from a mobile phone or tablet.


Supported Measurements: Water Level, Water Temperature, Absolute Pressure, Barometric Pressure, Differential Pressure

Key Advantages:

- Wireless data offload to mobile devices via BLE
- Direct-read cable connects sensor to top-end logger
- Integrated barometric pressure sensor enables direct water level readout
- Reference water level can be entered at start of deployment
- Use HOBOMobile for setup, data viewing, and data sharing
- The cable includes Kevlar strength member
- Powered by two user replaceable AA batteries
- Normal, multi-rate, and burst-logging modes
- Durable ceramic sensor
- Available with stainless steel or titanium sensor ends





Minimum System Requirements:

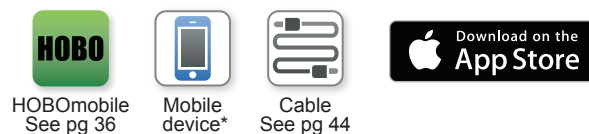

Accurate Data, Easily

Onset's HOBOMobile™ app, a free download from iTunes, makes it a snap to configure HOBO MX2001 loggers and manage the collected data. You can view data in graphs, check the operational status of loggers, configure alarm notifications, and share data files.

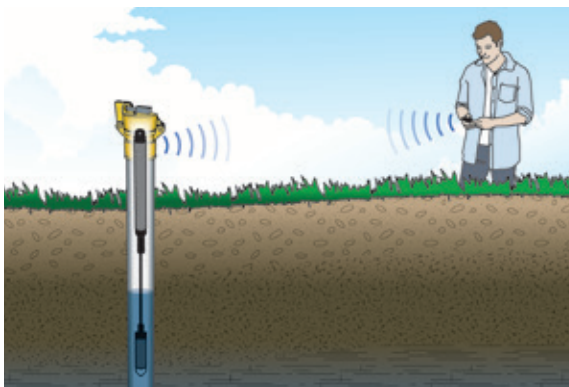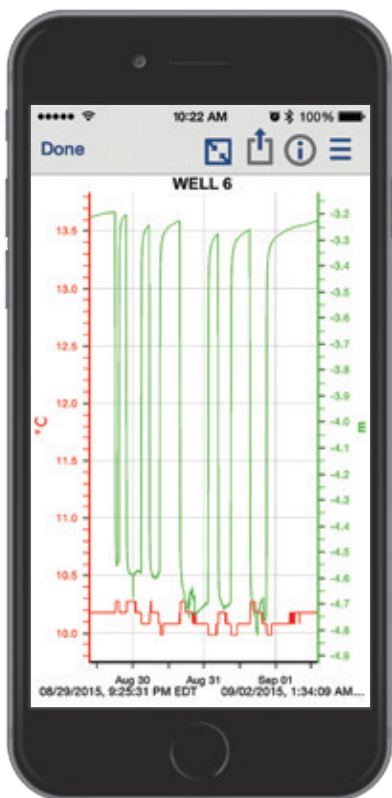

*Mobile device with: -iOS 8.3, 8.4, or 9.0 -Bluetooth 4.0 or later

HOBO MX2001 Water Level Logger

Innovative

Two-sensor design provides direct water level readout without vent tubes.


User-replaceable batteries

Interchangeable kevlar reinforced cable

Integrated barometric pressure sensor

Bluetooth Low Energy (BLE) communication

Durable ceramic sensor

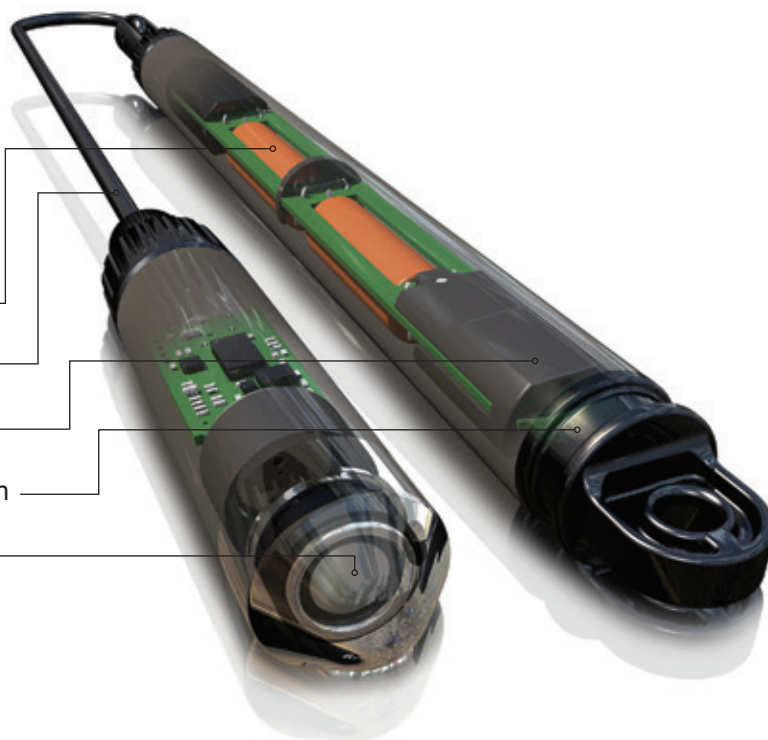

► For complete information and accessories, please visit: www.onsetcomp.com

| Part number | MX2001-01 (and-Ti) | MX2001-02 | MX2001-03 | MX2001-04 (and-Ti) |
|--|---|--|---|---|
| Water Level | | | | |
| Range | Approx. 0 to 9 m (0 to 30 ft) | Approx. 0 to 30.6 m (0 to 100 ft) | Approx. 0 to 76.5 m (0 to 251 ft) | Approx. 0 to 4 m (0 to 13 ft) |
| Calibrated Range (0° to 40°C (32° to 104°F)) | 69 to 207 kPa (10 to 30 psia) | 69 to 400 kPa (10 to 58 psia) | 69 to 850 kPa (10 to 123.3 psia) | 69 to 145 kPa (10 to 21 psia) |
| Accuracy (Typical) | ±0.05% FS, 0.5 cm (0.015 ft) | ±0.05% FS, 1.5 cm (0.05 ft) | ±0.05% FS, 3.8 cm (0.125 ft) | ±0.075% FS, 0.3 cm (0.01 ft) |
| Resolution | 0.02 kPa (0.003 psi), 0.21 cm (0.007 ft) water | <0.04 kPa (0.006 psi), 0.41 cm (0.013 ft) water | <0.085 kPa (0.012 psi), 0.87 cm (0.028 ft) water | <0.014 kPa (0.002 psi), 0.14 cm (0.005 ft) water |
| Temperature | | | | |
| Range | -20° to 50°C (-4° to 122°F) | | | |
| Accuracy | ±0.44°C from 0° to 50°C (±0.79°F from 32° to 122°F) | | | |
| Resolution | 0.1°C at 25°C (0.18°F at 77°F) | | | |
| Barometric Pressure | | | | |
| Range | 66 to 107 kPa (9.57 to 15.52 psia) | | | |
| Accuracy (typical) | ±0.075% FS, 0.3 cm (0.01 ft) water | | | |
| Logger Specifications | | | | |
| Operating Range | -20° to 50°C (-4° to 122°F) | | | |
| Transmission Range | Approximately 30.5 m (100 ft) line-of-sight | | | |
| Dimensions | Top end (MX2001-TOP): 2.54 cm (1.0 inches) diameter, 28.9 cm (11.4 inches) length Sensor end (MX2001-0x-S and MX2001-0x-Ti-S: 2.54 cm (1.0 inches) diameter, 9.91 cm (3.9 inches) length | | | |
| CE compliant | Yes | | | |
| FCC compliant | Yes | | | |
| Mobile Device Compatibility | *iOS 8.3, 8.4 & 9.0, and Bluetooth 4.0 or later | | | |
| Bluetooth Compatibility | Bluetooth 4.0 or later (Bluetooth Low Energy, Bluetooth Smart) | | | |

See pages 43-44 for additional accessories
Direct read cables can be ordered in lengths from 0.2 m to 500 m

HOBO U20 Series Water Level Loggers

Accurate, affordable water level monitoring

HOBO Water Level data loggers offer high accuracy at an affordable price, with no cumbersome vent tubes or desiccants to maintain. These data loggers are ideal for recording water levels and temperatures in wells, streams, lakes, wetlands and tidal estuaries.

Supported Measurements: Water Level, Barometric Pressure, Pressure (Absolute), Temperature

Key Advantages:

- Available in 4 depth ranges
- No-vent-tube design for easy and reliable deployment
- Available in stainless steel and titanium* versions
- Durable ceramic pressure sensor for reliable performance
- Calibration certificate included

Minimum System Requirements:



Software
See pg 35



Base Station¹
See pg 45



Coupler²



Water Level Logger Kits:

Deluxe Kit includes a carrying case, two HOBO Water Level Loggers (one 13 foot for barometric pressure and one 13 foot, 30 foot, or 100 foot), HOBOWare Pro software, and a HOBO Waterproof Data Shuttle with coupler. The Starter Kit includes a HOBO Water Level Logger, HOBOWare Pro Software, and an Optic USB Base Station. Available in 13 foot, 30 foot, and 100 foot depths.



Deluxe Kit



Starter Kit

► For complete information and accessories, please visit: www.onsetcomp.com

| Part number | U20-001-04/ U20-001-04-Ti | U20-001-01/ U20-001-01-Ti | U20-001-02/ U20-001-02-Ti | U20-001-03/ U20-001-03-Ti |
|--|---|--|--|---|
| HOBO Water Level Specifications | | | | |
| Range | 0-4 m (0-13 ft) 0-145 kPa (0-21 psia) | 0-9 m (0-30 ft) 0-207 kPa (0-30 psia) | 0-30 m (0-100 ft) 0-400 kPa (0-58 psia) | 0-76 m (0-250 ft) 0-850 kPa (0-123 psia) |
| Factory Calibrated Range (0° to 40°C; 32° to 104°F) | 69 to 145 kPa (10-21 psia) | 69 to 207 kPa (10-30 psia) | 69 to 400 kPa (10-58 psia) | 69 to 850 kPa (10-123 psia) |
| Water Level Accuracy (Typical Error) | ± 0.3 cm (0.01 ft) (± 0.075% FS) | ± 0.5 cm (0.015 ft) (± 0.05% FS) | ± 1.5 cm (0.05 ft) (± 0.05% FS) | ± 3.8 cm (0.125 ft) (± 0.05% FS) |
| Resolution | 0.14 cm (0.005 ft) | 0.21 cm (0.007 ft) | 0.41 cm (0.013 ft) | 0.87 cm (0.028 ft) |
| Burst Pressure | 310 kPa (45 psia) 18 m (60 ft) depth | | 500 kPa (72.5 psia) 40.8 m (134 ft) depth | 1200 kPa (174 psia) 112 m (368 ft) depth |
| Temperature Specifications (all models) | | | | |
| Range | -20° to 50°C (-4° to 122°F) | | | |
| Accuracy | ± 0.37° @ 20°C (± 0.67° @ 68°F) ± 0.44° from 0° to 50°C (± 0.79° from 32° to 122°F) | | | |
| Resolution (10 bit) | 0.1° @ 20°C (0.18° @ 68°F) | | | |
| Response time | 5 minutes (to 90% in water) | | | |
| Dimensions | 2.46 cm diameter x 15 cm (0.97 x 5.9 in) hole in mounting bail 6.3 mm (0.25 in) | | | |
| CE compliant | Yes | | | |

*Titanium version recommended for saltwater deployment.

¹HOBO Base Station or HOBO Waterproof Shuttle required. See pages 45-46 for more details.

²Coupler included with HOBO Base Station or HOBO Waterproof Shuttle.

HOBO U20L Series Water Level Loggers

A new standard for price/performance

HOBO U20L Series Water Level loggers set a new standard for price/performance for accurate water level and temperature monitoring. The loggers combine 0.1% measurement accuracy, a polypropylene housing for use in both fresh and salt water, and a non-vented design for convenient and hassle-free deployment.

Supported Measurements: Water Level, Barometric Pressure, Pressure (Absolute), Temperature

Key Advantages:

- Self-contained, non-vented design enables easy deployment
- Ideal for use in both fresh and saltwater environments
- Durable ceramic pressure sensor
- Ideal for use in wells, streams, lakes, wetlands and tidal areas

Minimum System Requirements:



Software
See pg 35



Base Station¹
See pg 45



Coupler²



► For complete information and accessories, please visit: www.onsetcomp.com

| Part number | U20L-04 | U20L-01 | U20L-02 |
|--|--|--|--|
| HOBO Water Level Specifications | | | |
| Range | 0-4 m (0-13 ft) 0 to 145 kPa (0 to 21 psia) | 0-9 m (0-30 ft) 0 to 207 kPa (0 to 30 psia) | 0-30.6 m (0-100 ft) 0 to 400 kPa (0 to 58 psia) |
| Factory Calibrated Range (0° to 40°C; 32° to 104°F) | 69 to 145 kPa (10 to 21 psia) | 69 to 207 kPa (10-30 psia) | 69 to 400 kPa (10 to 58 psia) |
| Water Level Accuracy (Typical Error) | ± 0.4 cm (0.013 ft) (± 0.1% FS) | ± 1.0 cm (0.03 ft) (± 0.1% FS) | ± 3.0 cm (0.1 ft) (± 0.1% FS) |
| Resolution | 0.14 cm (0.005 ft) water | 0.21 cm (0.007 ft) water | 0.41 cm (0.013 ft) water |
| Burst Pressure | 310 kPa (45 psia) 18 m (60 ft) depth | 310 kPa (45 psia) 18 m (60 ft) depth | 500 kPa (72.5 psia) 40.8 m (134 ft) depth |
| Temperature Specifications (all models) | | | |
| Range | -20° to 50°C (-4° to 122°F) | | |
| Accuracy | ± 0.37° @ 20°C (± 0.67° @ 68°F) ± 0.44° from 0° to 50°C (± 0.79° from 32° to 122°F) | | |
| Resolution (10 bit) | 0.1° @ 20°C (0.18° @ 68°F) | | |
| Response time | 10 minutes (to 90% in water) | | |
| Dimensions | 3.18 cm diameter x 15.24 cm (1.25 x 6.0 in) hole in mounting bail 6.3 mm (0.25 in) | | |
| CE compliant | Yes | | |

¹HOBO Base Station or HOBO Waterproof Shuttle required. See pages 45-46 for more details.

²Coupler included with HOBO Base Station or HOBO Waterproof Shuttle.

HOBO Conductivity Loggers

Conductivity monitoring for freshwater and stable saltwater applications

HOBO Conductivity Loggers are convenient, rugged, and cost-effective data loggers for a variety of freshwater and saltwater monitoring applications.



The HOBOnet U24-001 model provides high-accuracy conductivity data in freshwater environments, for applications such as environmental impact monitoring, stormwater management, and water quality studies.

The HOBOnet U24-002-C model is for saltwater environments with relatively small changes in salinity ($\pm 5,000 \mu\text{S/cm}$) such as saltwater bays, or to detect salinity events such as upwelling, rainstorm, and discharge events. This logger can also be used to gather salinity data for salinity compensation of HOBOnet U26 Dissolved Oxygen logger data. **Note:** This logger is not intended for monitoring salinity levels in waters with widely changing salinities as it can have significant measurement error and drift in those environments.

Supported Measurements: Conductivity, Salinity, Temperature

Minimum System Requirements:

Key Advantages:

- Non-contact capacitive sensor provides long life
- Easy access to sensor for cleaning and shedding air bubbles
- HOBOnet Pro software provides compensation for fouling using calibration points from the start and end of each deployment
- Optical interface provides high-speed, reliable data offload in wet environments
- Compatible with HOBOnet Waterproof Shuttle for easy and reliable data retrieval



Software
See pg 35



Base Station*
See pg 45



Coupler¹

► For complete information and accessories, please visit: www.onsetcomp.com

| Part number | U24-001 Conductivity | U24-002-C Conductivity/Salinity |
|---|---|--|
| Memory | 18,500 temperature and conductivity measurements when using one conductivity range; 14,400 sets of measurements when using both conductivity ranges (64 kbytes) | |
| Conductivity Calibrated Measurement Ranges | Low Range: 0 to 1,000 $\mu\text{S/cm}$ Full Range: 0 to 10,000 $\mu\text{S/cm}$ | Low Range: 100 to 10,000 $\mu\text{S/cm}$ High Range: 5,000 to 55,000 $\mu\text{S/cm}$ |
| Conductivity Calibrated Range – Temperature Range | 5° to 35°C (41° to 95°F) | |
| Specific Conductance Accuracy (in Calibrated Range using Conductivity Assistant and Calibration Measurements) | Low Range: 3% of reading, or 5 $\mu\text{S/cm}$ Full Range: 3% of reading, or 20 $\mu\text{S/cm}$, whichever is greater | Low Range: 3% of reading or 50 $\mu\text{S/cm}$, whichever is greater High Range: 5% of reading, in waters within a range of $\pm 3,000 \mu\text{S/cm}$; waters with greater variation can have substantially greater error |
| Conductivity Resolution (typical) | 1 $\mu\text{S/cm}$ | 2 $\mu\text{S/cm}$ |
| Conductivity Drift | Less than 3% sensor drift per year | Up to 12% sensor drift per month. Use monthly start & end-point calibration to compensate |
| Temperature Accuracy (in Calibrated Range) | 0.1°C (0.2°F) | |
| Temperature Resolution | 0.01°C (0.02°F) | |
| Response Time | 1 second to 90% of change (in water) | |
| Measurement and Operating Range | 0° to 36°C (32° to 97°F) -non-freezing | -2° to 36°C (28° to 97°F) -non-freezing |
| Sample rate | 1 second to 18 hrs, fixed or multiple-rate sampling with up to 8 user-defined sampling intervals | |
| Time Accuracy | ± 1 minute per month | |
| Battery | 3.6 Volt lithium battery, life: 3 years (at 1 minute logging), typical | |
| Maximum Depth | 70 m (225 ft) | |
| Dimensions | 3.18 cm diameter x 16.5 cm, with 6.3 mm mounting hole (1.25 in diameter x 6.5", 1/4 in hole) | |
| CE compliant | Yes | |

*HOBOnet Base Station or HOBOnet Waterproof Shuttle required. See pages 45-46 for more details.

¹Coupler included with HOBOnet Base Station or HOBOnet Waterproof Shuttle.

HOBO Dissolved Oxygen Logger

Affordable, high-performance dissolved oxygen monitoring

The HOBO U26 Dissolved Oxygen Logger measures concentrations of dissolved oxygen in lakes, streams, rivers, estuaries, and coastal waters. Used by aquatic biologists, hydrologists, and other research professionals to monitor water quality, the U26 is ideal for climate change and environmental impact studies as well as ecological and oceanographic research.

The HOBO U26 combines the high-accuracy, robust performance of industry-leading RDO® Basic (Rugged Dissolved Oxygen) sensor technology with an easy-to-maintain design, all at a fraction of the cost of other monitoring options.

Supported Measurements: Dissolved Oxygen, Temperature

Key Advantages:

- Affordable, high performance DO monitoring with 0.2 mg/L accuracy
- Optical DO sensor technology for long-lasting calibration, less maintenance
- Software corrects for measurement drift from fouling; provides salinity-adjusted DO concentration and percent saturation (Salinity adjustment requires salinity meter reading or data logger file. Percent saturation requires barometric pressure data file.)
- Optic USB interface for high-speed, reliable data offload
- Easy-to-replace DO sensor cap lasts six months

► For complete information and accessories, please visit: www.onsetcomp.com



Minimum System Requirements:



Software
See pg 35



Base Station*
See pg 45



Coupler¹

| Part number | U26-001 |
|---|---|
| | Dissolved Oxygen |
| Sensor Type | Optical |
| Measurement Range | 0 to 30 mg/L |
| Calibrated Range | 0 to 20 mg/L; 0 to 35°C (32 to 95°F) |
| Accuracy | 0.2 mg/L up to 8 mg/L; 0.5 mg/L from 8 to 20 mg/L |
| Resolution | 0.02 mg/L |
| Response time | To 90% in less than 2 minutes |
| DO Sensor Cap Life | 6 months (cap expires 7 months after initialization) |
| | Temperature |
| Operating Temperature and Measurement Range | -5 to 40°C (23 to 104°F), non-freezing |
| Temperature Accuracy | 0.2°C (0.36°F) |
| Temperature Resolution | ± 0.02°C (± 0.04°F) |
| Response Time | To 90% in less than 30 minutes |
| | Logger |
| Memory | 21,700 sets of DO and temperature measurements |
| Logging Rate | 1 minute to 18 hours |
| Time Accuracy | ± 1 minute per month at 25°C (77°F) |
| Battery | 3.6 V lithium battery; factory replaceable, life: 3 years (at 1 minute logging) |
| Maximum Depth | 100 m (328 ft) |
| Dimensions | 39.6 mm diameter x 266.7 mm (1.56 in diameter x 10.5 in) |
| CE Compliant | Yes |

*HOBO Base Station or HOBO Waterproof Shuttle required. See pages 45-46 for more details.

¹Coupler included with HOBO Base Station or HOBO Waterproof Shuttle.

HOBOWare / HOBOWare Pro

Graphing and analysis software



HOBOWare is Onset's flagship setup, graphing and analysis software package for HOBOWare data loggers. It allows you to view, graph, and analyze data with point-and-click simplicity. You can easily set up your application in a matter of minutes, quickly read out and plot data, and export to spreadsheets for further analysis.

Standard Features:

- Simple menus for fast, easy logger setup and readout
- Scaling to real-world engineering units
- Presentation-quality graphs
- Easy export of data files to text format
- Free download

HOBOWare Pro Features:

- Time-saving tools for fast setup and readout
- Advanced plotting tools for more precise data analysis
- Access to Data Assistants for post-processing data

Download HOBOWare today at onsetcomp.com.

Or download your free 30-day trial of HOBOWare Pro. From setup to analysis, no other data logger software can compare to the power and simplicity of HOBOWare Pro.

HOBOWare features comparison

| | HOBOWare | HOBOWare Pro |
|--|---------------|--------------|
| Support for all HOBOWare data loggers | ✓ | ✓ |
| Quickly generate presentation-quality graphs | ✓ | ✓ |
| Copy & paste series | ✓ | ✓ |
| Merge data files | ✓ | ✓ |
| Save modified graphs as projects | ✓ | ✓ |
| Easy data export to XLS, CSV, & TXT files | ✓ | ✓ |
| Linear & Pulse Scaling Data Assistants | ✓ | ✓ |
| Time-saving tools for fast setup, readout & export | | ✓ |
| Data assistants for post processing Dissolved Oxygen, Conductivity, Water Level, Growing Degree Days, Grains per Pound & kWh | | ✓ |
| Ability to create pie charts | | ✓ |
| Crop a series to a specific time frame | | ✓ |
| Subset Statistics Tool for details within a time frame | | ✓ |
| 21 CFR Part11 Compliance | | ✓ |
| Data Shuttle support | | ✓ |
| HOBONode manager to support ZW Data Nodes | | ✓ |
| | Free Download | |

System Requirements

- PC: Windows 8, Windows 7 (Pro, Ultimate and Home Premium), Windows 10 (Pro, Ultimate and Home Premium).
- Windows 7 Enterprise: Note: While HOBOWare has been modified to work on Windows 7 Enterprise, there may be local configurations of that operating system that will not work with HOBOWare.
- Mac: OS X Versions 10.9.x, 10.10.x and 10.11.x.
- Java Runtime Environment (JRE) 1.6 or 1.7 (32-bit or 64-bit on Windows). Please note that Windows 8 users needing serial logger support must have Java 7 (1.7.0_9) or greater. Please note that version 1.6, also known as Java 6, is officially supported on OS X only on Intel Core 2 Duo and later processors. See the time zone note below.
- One of the following Internet browsers: Safari 6, Microsoft Internet Explorer 10 and 11, as well as the most recent versions of Firefox and Google Chrome.
- Minimum screen resolution of 1024x768. Recommended screen resolution of 1280x800 or greater particularly for non-English users.
- 256+ colors
- 1.8 GHz single core CPU, 1GM RAM*

Note: Temp & RH NIST certification services available for this product. Please visit onsetcomp.com, or call us at 1-800-564-4377.

HOBOMobile

Easy logger setup and data management software for HOBO MX Series loggers



HOBOMobile™ is designed to enable communication between a Bluetooth® Smart mobile phone or tablet and the HOBO MX series data loggers. You can configure and start the data logger, download the recorded data, and store and analyze the data. The HOBOMobile app is a free download. See pages 1-2 for more details.



HOBOMobile for Android currently supports MX1101 only. Support for MX1102 coming soon!

Key Advantages:

- Communicate to HOBO MX data loggers using Bluetooth Smart, with no internet connection required
- Set data logger's name, password, logging rate, alarm threshold, and start & stop time
- Configure and clear audible alarms
- Page the data logger
- Export and share data as CSV, TXT, XLSX or HOBO files

Measure and log temperature and relative humidity in sensitive environments



Warehouses and storage facilities



Data centers and high-tech environments



Museums, archives and libraries



Commercial office buildings



Manufacturing facilities and testing labs



Hospitals and labs

If CO₂, temperature and humidity management are critical in your facility, do it faster and easier than ever with the new, Bluetooth Smart enabled HOBO MX Series Data Loggers.

Without connecting anything or even coming into physical contact with your data logger, you can set up the logger, check its status, page to locate it, and read out your data to be shared. It's incredibly easy for anyone to use, and leverages the tools we all have in our back pockets and backpacks – our phones and tablets!

Note: Temp & RH NIST certification services available for this product. Please visit onsetcomp.com, or call us at 1-800-564-4377.

HOBOnode Manager

Powerful network management software for HOBO ZW Series Data Loggers



HOBOnode Manager, a component of HOBOWare Pro, lets you view real-time energy and environmental data, receive alarm notifications, and manage and view your entire HOBO ZW wireless sensor network. It offers a range of convenient data access options and the ability to export your data to Microsoft Excel and other programs. See page 14 for more details.


Key Advantages:

- Easy network setup and monitoring
- Real-time graphing
- Easy alarm setup
- Network Map feature for visual representation of all nodes and network connections




View Real-Time Plots

In the plots window, you can view up to 20 sensor data points in real-time, all at once.

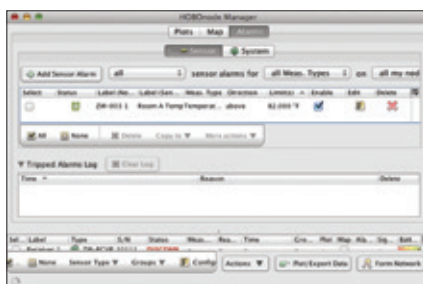

Easy Alarm Setup

Easily configure both sensor and system alarms. Get notified via text message or email when conditions exceed set thresholds.

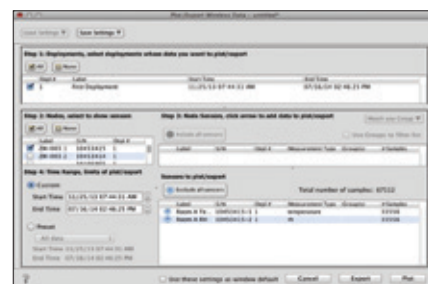

Automated Data Delivery

Get your data forwarded to FTP site or email address at regular intervals. Easy integration with third-party programs.

HOBOLink Web-Based Display/Readout


Powerful web-based access to HOBO RX3000 Remote Monitoring Systems



HOBOLink is a web-enabled software platform designed for HOBO RX3000 Remote Monitoring Systems. This data logger software allows you to easily access current and historical data, set alarm notifications and relay activations, and manage and control your HOBO RX3000 web-based data logging systems. See pages 15, 23 and 24 for more details.

Key Advantages:

- Get 24/7 web access to your data
- Access your data via web browser
- Customize your data display
- Verify RX3000 system status remotely
- Set up and manage alarm notifications over the web
- Schedule automated delivery of data files
- Analyze data faster with custom export capabilities

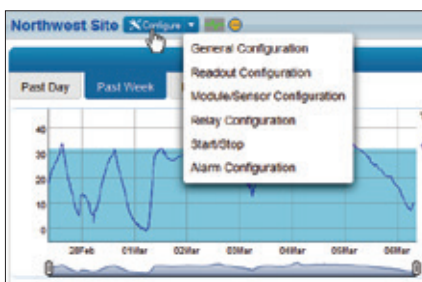


Web-based configuration

HOBOLink allows you to easily configure sensors, logging, alarm notifications, relay activations, and more.



Get notified

HOBOLink will send an email or a text message to your phone when conditions exceed set thresholds. Multiple levels of alarms and actions can be set for each sensor.

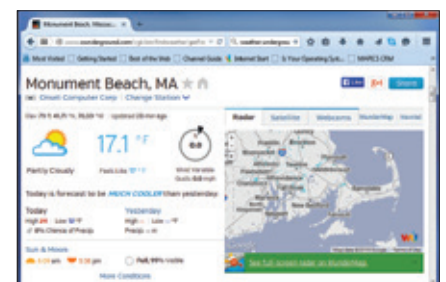

Get data automatically

Configure HOBOLink to automatically deliver data from RX3000s to other web-based services, such as Weather Underground.

External Sensors by Measurement

Indoor Environmental

Temperature

| Part number | Type | RX3000 | U30 | H21 | H22 | U12 | U14 | ZW | UX90 | UX100 | UX120 |
|-------------------------|---------------------------------------|--------|-----|-----|-----|-----|-----|----|------|-------|-------|
| S-THB-M002 ¹ | 12-bit Temp/RH smart (2m cable) | ✓ | ✓ | ✓ | ✓ | | ✓ | | | | |
| S-THB-M008 ¹ | 12-bit Temp/RH smart (8m cable) | ✓ | ✓ | ✓ | ✓ | | ✓ | | | | |
| S-TMB-M002 | 12-bit Temp/RH smart (2m cable) | ✓ | ✓ | ✓ | ✓ | | ✓ | | | | |
| S-TMB-M006 | 12-bit Temp smart (6m cable) | ✓ | ✓ | ✓ | ✓ | | ✓ | | | | |
| S-TMB-M017 | 12-bit Temp smart (17m cable) | ✓ | ✓ | ✓ | ✓ | | ✓ | | | | |
| TC6-J | Type J beaded thermocouple | | | | | | | | | ✓ | ✓ |
| TC6-K | Type K beaded thermocouple | | | | | | | | | ✓ | ✓ |
| TC6-T | Type T beaded thermocouple | | | | | | | | | ✓ | ✓ |
| TCP6-K12 | Type K Probe thermocouple | | | | | | | | | ✓ | ✓ |
| TMC1-HD | Air/Water/Soil Temp (1' cable) | | | | | ✓ | | ✓ | | | ✓ |
| TMC6-HD | Air/Water/Soil Temp (6' cable) | | | | | ✓ | | ✓ | | | ✓ |
| TMC20-HD | Air/Water/Soil Temp (20' cable) | | | | | ✓ | | ✓ | | | ✓ |
| TMC50-HD | Air/Water/Soil Temp (50' cable) | | | | | ✓ | | ✓ | | | ✓ |
| TMC6-HC | Stainless steel Temp probe (6' cable) | | | | | ✓ | | ✓ | | | ✓ |
| TMC6-HE | Pipe Temp (6' cable) | | | | | ✓ | | ✓ | | | ✓ |

Relative Humidity

| Part number | Type | RX3000 | U30 | H21 | H22 | U12 | U14 | ZW | UX90 | UX100 | UX120 |
|-------------------------|---------------------------------|--------|-----|-----|-----|-----|-----|----|------|-------|-------|
| S-THB-M002 ¹ | 12-bit Temp/RH smart (2m cable) | ✓ | ✓ | ✓ | ✓ | | ✓ | | | | |
| S-THB-M008 ¹ | 12-bit Temp/RH smart (8m cable) | ✓ | ✓ | ✓ | ✓ | | ✓ | | | | |

Carbon Dioxide

| Part number | Type | RX3000 | U30 | H21 | H22 | U12 | U14 | ZW | UX90 | UX100 | UX120 |
|-------------|------------------|--------|-----|-----|-----|-----|-----|----|------|-------|-------|
| TEL-7001 | Telaire 7001 CO2 | ✓ | ✓ | | ✓ | ✓ | | ✓ | | | ✓ |

Air Velocity

| Part number | Type | RX3000 | U30 | H21 | H22 | U12 | U14 | ZW | UX90 | UX100 | UX120 |
|----------------|----------------------------|--------|-----|-----|-----|-----|-----|----|------|-------|-------|
| T-DCI-F900-L-O | Air Velocity – 5 m/s long | ✓ | ✓ | | ✓ | ✓ | | ✓ | | | ✓ |
| T-DCI-F900-L-P | Air Velocity – 10 m/s long | ✓ | ✓ | | ✓ | ✓ | | ✓ | | | ✓ |
| T-DCI-F900-S-O | Air Velocity – 5 m/s std | ✓ | ✓ | | ✓ | ✓ | | ✓ | | | ✓ |
| T-DCI-F900-S-P | Air Velocity – 10 m/s std | ✓ | ✓ | | ✓ | ✓ | | ✓ | | | ✓ |

Volatile Organic Compound

| Part number | Type | RX3000 | U30 | H21 | H22 | U12 | U14 | ZW | UX90 | UX100 | UX120 |
|-------------|---------------------------|--------|-----|-----|-----|-----|-----|----|------|-------|-------|
| T-ION-TVOC | Volatile Organic Compound | ✓ | ✓ | | ✓ | ✓ | | ✓ | | | ✓ |

Differential Pressure

| Part number | Type | RX3000 | U30 | H21 | H22 | U12 | U14 | ZW | UX90 | UX100 | UX120 |
|-------------|----------------------------------|--------|-----|-----|-----|-----|-----|----|------|-------|-------|
| T-VER-PXU-L | Differential pressure transducer | ✓ | ✓ | | ✓ | ✓ | | ✓ | | | ✓ |
| T-VER-PXU-X | Differential pressure transducer | ✓ | ✓ | | ✓ | ✓ | | ✓ | | | ✓ |

Compressed Air Flow

| Part number | Type | RX3000 | U30 | H21 | H22 | U12 | U14 | ZW | UX90 | UX100 | UX120 |
|----------------|---------------------------|--------|-----|-----|-----|-----|-----|----|------|-------|-------|
| T-CDI-5200-10S | Compressed Air Flow Meter | ✓ | ✓ | | ✓ | ✓ | | ✓ | | | ✓ |
| T-CDI-5200-20S | Compressed Air Flow Meter | ✓ | ✓ | | ✓ | ✓ | | ✓ | | | ✓ |

¹ Note: Temp & RH NIST certification services available for this product. Please visit onsetcomp.com, or call us at 1-800-564-4377.

External Sensors by Measurement

Gauge Pressure

| Part number | Type | RX3000 | U30 | H21 | H22 | U12 | U14 | ZW | UX90 | UX100 | UX120 |
|--------------|-------------------------|--------|-----|-----|-----|-----|-----|----|------|-------|-------|
| T-ASH-G2-100 | Ashcroft gauge pressure | ✓ | ✓ | | ✓ | ✓ | | ✓ | | | ✓ |
| T-ASH-G2-200 | Ashcroft gauge pressure | ✓ | ✓ | | ✓ | ✓ | | ✓ | | | ✓ |
| T-ASH-G2-500 | Ashcroft gauge pressure | ✓ | ✓ | | ✓ | ✓ | | ✓ | | | ✓ |

Energy/Power

kW & kWh

| Part number | Type | RX3000 | U30 | H21 | H22 | U12 | U14 | ZW | UX90 | UX100 | UX120 |
|----------------|--|--------|-----|-----|-----|-----|-----|----|------|-------|-------|
| T-VER-E50B2 | Power & Energy meter | ✓ | ✓ | ✓ | ✓ | | | ✓ | | | ✓ |
| T-WNB-3D-240 | WattNode 208/240 VAC 3-phase | ✓ | ✓ | ✓ | ✓ | | | ✓ | ✓ | | ✓ |
| T-WNB-3D-480 | WattNode 480 VAC 3-phase | ✓ | ✓ | ✓ | ✓ | | | ✓ | ✓ | | ✓ |
| T-WNB-3Y-208-P | WattNode 208-240VAC 2 or 3 Branch | ✓ | ✓ | ✓ | ✓ | | | ✓ | | | ✓ |
| T-WNB-3Y-208 | WattNode 208/240 VAC 1,2, or 3-Phase | ✓ | ✓ | ✓ | ✓ | | | ✓ | ✓ | | ✓ |
| T-VER-8044-100 | Veris 480 V, 100 Amp Kilowatt transducer | ✓ | ✓ | | ✓ | ✓ | | ✓ | | | ✓ |
| T-VER-8051-300 | Veris kWh transducer 1-Phase, 300 Amp | ✓ | ✓ | ✓ | ✓ | | | ✓ | ✓ | | ✓ |
| T-VER-8053-800 | Veris kWh transducer 3-Phase, 800 Amp | ✓ | ✓ | ✓ | ✓ | | | ✓ | ✓ | | ✓ |

AC & DC Current

| Part number | Type | RX3000 | U30 | H21 | H22 | U12 | U14 | ZW | UX90 | UX100 | UX120 |
|-----------------|---|--------|-----|-----|-----|-----|-----|----|------|-------|-------|
| CTV-A | 2 - 20 Amp split-core AC current sensor | | | | | ✓ | | ✓ | | | ✓ |
| CTV-B | 5 - 50 Amp split-core AC current sensor | | | | | ✓ | | ✓ | | | ✓ |
| CTV-C | 10 - 100 Amp split-core AC current sensor | | | | | ✓ | | ✓ | | | ✓ |
| CTV-D | 20 - 200 Amp split-core AC current sensor | | | | | ✓ | | ✓ | | | ✓ |
| CTV-E | 60 - 600 Amp split-core AC current sensor | | | | | ✓ | | ✓ | | | ✓ |
| T-MAG-0400-05 | 0.5 - 5 AMP split-core AC transformer | ✓ | ✓ | | ✓ | | | | | | |
| T-MAG-0400-20 | 2 - 20 AMP split-core AC transformer | ✓ | ✓ | | ✓ | | | | | | |
| T-MAG-0400-50 | 5 - 50 AMP split-core AC transformer | ✓ | ✓ | | ✓ | | | | | | |
| T-MAG-0400-75 | 7.5 - 75 AMP split-core AC transformer | ✓ | ✓ | | ✓ | | | | | | |
| T-ACT-0750-020 | 0.2 - 20 Amp split-core AC transformer | ✓ | ✓ | | ✓ | | | | | | |
| T-ACT-0750-050 | 0.5 - 50 Amp split-core AC transformer | ✓ | ✓ | | ✓ | | | | | | |
| T-ACT-0750-100 | 1 - 100 Amp split-core AC transformer | ✓ | ✓ | | ✓ | | | | | | |
| T-ACT-0750-250 | 2.5 - 250 Amp split-core AC transformer | ✓ | ✓ | | ✓ | | | | | | |
| T-MAG-SCT-100 | 10 - 100 Amp split-core AC transformer | ✓ | ✓ | | ✓ | | | | | | |
| T-MAG-SCT-200 | 20 - 200 Amp split-core AC transformer | ✓ | ✓ | | ✓ | | | | | | |
| T-MAG-SCT-600 | 60 - 600 Amp split-core AC transformer | ✓ | ✓ | | ✓ | | | | | | |
| T-VER-971BP-200 | Split-Core Bi-Polar DC transducer | ✓ | ✓ | | ✓ | ✓ | | ✓ | | | ✓ |
| T-VER-H970-200 | Split-Core 200A DC transducer | ✓ | ✓ | | ✓ | ✓ | | ✓ | | | ✓ |

AC & DC Voltage

| Part number | Type | RX3000 | U30 | H21 | H22 | U12 | U14 | ZW | UX90 | UX100 | UX120 |
|------------------|--------------------------------------|--------|-----|-----|-----|-----|-----|----|------|-------|-------|
| T-MAG-SPT-150 | 150 Volt AC potential transformer | ✓ | ✓ | | ✓ | | | | | | |
| T-MAG-SPT-300 | 300 Volt AC potential transformer | ✓ | ✓ | | ✓ | | | | | | |
| T-MAG-SPT-600 | 600 Volt AC potential transformer | ✓ | ✓ | | ✓ | | | | | | |
| T-CON-ACT-150 | ConLab 0-150 Volt AC transmitter | | | | | ✓ | | ✓ | | | ✓ |
| T-CON-ACT-300 | ConLab 0-300 Volt AC transmitter | | | | | ✓ | | ✓ | | | ✓ |
| S-CIA-CM14 | 12-bit 4-20mA input adapter | ✓ | ✓ | ✓ | ✓ | | | | | | |
| S-VIA-CM14 | 12-bit voltage input adapter | ✓ | ✓ | ✓ | ✓ | | | | | | |
| CABLE-ADAP5 | Voltage input cable 0-5 VDC | | | | | ✓ | | ✓ | | | ✓ |
| CABLE-ADAP10 | Voltage input cable 0-10 VDC | | | | | ✓ | | ✓ | | | ✓ |
| CABLE-ADAP24 | Voltage input cable 0-24 VDC | | | | | | | | | | ✓ |
| CABLE-4-20MA | Measures currents from 0 to 20.1 mA | | | | | | | | | | ✓ |
| CABLE-2.5-STEREO | Voltage input cable 0-2.5 VDC | | | | | ✓ | | ✓ | ✓ | | ✓ |
| S-FS-CVIA | FlexSmart analog module (2 channels) | | | | ✓ | | | | | | |

External Sensors by Measurement

Energy/Power (continued)

Amp Hour, Amps, Power Factor, Volt-Amp Reactive, Volt-Amp Reactive Hour, Volt Amps, Volts, Watt Hours, Watts

| Part number | Type | RX3000 | U30 | H21 | H22 | U12 | U14 | ZW | UX90 | UX100 | UX120 |
|-------------|----------------------|--------|-----|-----|-----|-----|-----|----|------|-------|-------|
| T-VER-E50B2 | Power & Energy meter | ✓ | ✓ | ✓ | ✓ | | | ✓ | | | ✓ |

Pulse

| Part number | Type | RX3000 | U30 | H21 | H22 | U12 | U14 | ZW | UX90 | UX100 | UX120 |
|------------------|--|--------|-----|-----|-----|-----|-----|----|------|-------|-------|
| S-UCC-M001 | Electronic switch pulse input adapter - 1m | ✓ | ✓ | ✓ | ✓ | | | | | | |
| S-UCC-M006 | Electronic switch pulse input adapter - 6m | ✓ | ✓ | ✓ | ✓ | | | | | | |
| S-UCD-M001 | Contact closure pulse input adapter - 1m | ✓ | ✓ | ✓ | ✓ | | | | | | |
| S-UCD-M006 | Contact closure pulse input adapter - 6m | ✓ | ✓ | ✓ | ✓ | | | | | | |
| CABLE-2.5-STEREO | Voltage input cable 0-2.5 VDC | | | | | | | ✓ | ✓ | | ♦ |

Time-of-Use

Motor On/Off

| Part number | Type | RX3000 | U30 | H21 | H22 | U12 | U14 | ZW | UX90 | UX100 | UX120 |
|---------------------|-------------------|--------|-----|-----|-----|-----|-----|----|------|-------|-------|
| CSV-A8 ¹ | AC current switch | | | | | | | | ✓ | | ✓ |

Water

Water Temperature

| Part number | Type | RX3000 | U30 | H21 | H22 | U12 | U14 | ZW | UX90 | UX100 | UX120 |
|-------------------------|---------------------------------|--------|-----|-----|-----|-----|-----|----|------|-------|-------|
| S-TMB-M002 ¹ | 12-bit Temp smart (2m cable) | ✓ | ✓ | ✓ | ♦ | | ♦ | | | | |
| S-TMB-M006 | 12-bit Temp smart (6m cable) | ✓ | ✓ | ✓ | ♦ | | ♦ | | | | |
| S-TMB-M017 | 12-bit Temp smart (17m cable) | ✓ | ✓ | ✓ | ♦ | | ♦ | | | | |
| TMC1-HD | Air/Water/Soil Temp (1' cable) | | | | | ✓ | | ♦ | | | ♦ |
| TMC6-HD | Air/Water/Soil Temp (6' cable) | | | | | ✓ | | ♦ | | | ♦ |
| TMC20-HD | Air/Water/Soil Temp (20' cable) | | | | | ✓ | | ♦ | | | ♦ |
| TMC50-HD | Air/Water/Soil Temp (50' cable) | | | | | ✓ | | ♦ | | | ♦ |

Weather/Field

Temperature

| Part number | Type | RX3000 | U30 | H21 | H22 | U12 | U14 | ZW | UX90 | UX100 | UX120 |
|-------------------------|---------------------------------------|--------|-----|-----|-----|-----|-----|----|------|----------------|-------|
| S-THB-M002 ¹ | 12-bit Temp/RH smart (2m cable) | ✓ | ✓ | ✓ | ♦ | | ♦ | | | | |
| S-THB-M008 ¹ | 12-bit Temp/RH smart (8m cable) | ✓ | ✓ | ✓ | ♦ | | ♦ | | | | |
| S-TMB-M002 | 12-bit Temp smart (2m cable) | ✓ | ✓ | ✓ | ♦ | | ♦ | | | | |
| S-TMB-M006 | 12-bit Temp smart (6m cable) | ✓ | ✓ | ✓ | ♦ | | ♦ | | | | |
| S-TMB-M017 | 12-bit Temp smart (17m cable) | ✓ | ✓ | ✓ | ♦ | | ♦ | | | | |
| TC6-J | Type J beaded thermocouple | | | | | | | | | √ ² | ♦ |
| TC6-K | Type K beaded thermocouple | | | | | | | | | √ ² | ♦ |
| TC6-T | Type T beaded thermocouple | | | | | | | | | √ ² | ♦ |
| TCP6-K12 | Type K probe thermocouple | | | | | | | | | √ ² | ♦ |
| TMC1-HD | Air/Water/Soil Temp (1' cable) | | | | | ✓ | | ♦ | | | ♦ |
| TMC6-HD | Air/Water/Soil Temp (6' cable) | | | | | ✓ | | ♦ | | | ♦ |
| TMC20-HD | Air/Water/Soil Temp (20' cable) | | | | | ✓ | | ♦ | | | ♦ |
| TMC50-HD | Air/Water/Soil Temp (50' cable) | | | | | ✓ | | ♦ | | | ♦ |
| TMC6-HC | Stainless Steel Temp probe (6' cable) | | | | | ✓ | | ♦ | | | ♦ |
| TMC6-HE | Pipe Temp (6' cable) | | | | | ✓ | | ♦ | | | ♦ |

♦ This logger is intended for indoor environments, but sensors are compatible.

* Requires UX100-014M Thermocouple logger.

¹ Note: Temp & RH NIST certification services available for this product. Please visit onsetcomp.com, or call us at 1-800-564-4377.

External Sensors by Measurement

Weather/Field (continued)

PAR

| Part number | Type | RX3000 | U30 | H21 | H22 | U12 | U14 | ZW | UX90 | UX100 | UX120 |
|-------------|----------------------------|--------|-----|-----|-----|-----|-----|----|------|-------|-------|
| S-LIA-M003 | Photosynthetic light (PAR) | √ | √ | √ | ◆ | | | | | | |

Solar Radiation

| Part number | Type | RX3000 | U30 | H21 | H22 | U12 | U14 | ZW | UX90 | UX100 | UX120 |
|-------------|-----------------|--------|-----|-----|-----|-----|-----|----|------|-------|-------|
| S-LIB-M003 | Solar radiation | √ | √ | √ | ◆ | | | | | | |

Barometric Pressure

| Part number | Type | RX3000 | U30 | H21 | H22 | U12 | U14 | ZW | UX90 | UX100 | UX120 |
|-------------------------|-------------------------|--------|-----|-----|-----|-----|-----|----|------|-------|-------|
| S-BPB-CM50 ¹ | Barometric pressure | √ | √ | √ | ◆ | | | | | | |
| S-BPA-CM10 ¹ | HWS barometric pressure | | | √ | ◆ | | | | | | |

Wind Speed & Direction

| Part number | Type | RX3000 | U30 | H21 | H22 | U12 | U14 | ZW | UX90 | UX100 | UX120 |
|-------------|------------------------------------|--------|-----|-----|-----|-----|-----|----|------|-------|-------|
| S-WDA-M003 | Wind direction (3m cable) | √ | √ | √ | ◆ | | | | | | |
| S-WSB-M003 | Wind speed Smart Sensor (3m cable) | √ | √ | √ | ◆ | | | | | | |
| S-WSET-A | Wind Smart Sensor set | √ | √ | √ | ◆ | | | | | | |
| S-WCB-M003 | R.M. Young wind monitor-AQ adapter | √ | √ | √ | ◆ | | | | | | |
| S-WCC-M003 | R.M. Young marine wind adapter | √ | √ | √ | ◆ | | | | | | |
| S-WCE-M003 | R.M. Young wind monitor adapter | √ | √ | √ | ◆ | | | | | | |

Rainfall

| Part number | Type | RX3000 | U30 | H21 | H22 | U12 | U14 | ZW | UX90 | UX100 | UX120 |
|-------------|---|--------|-----|-----|-----|-----|-----|----|------|-------|-------|
| S-RGA-M002 | .01" Rain gauge Smart Sensor (2m cable) | √ | √ | √ | ◆ | | | | | | |
| S-RGB-M002 | .2mm Rain gauge Smart Sensor (2m cable) | √ | √ | √ | ◆ | | | | | | |

Soil Moisture

| Part number | Type | RX3000 | U30 | H21 | H22 | U12 | U14 | ZW | UX90 | UX100 | UX120 |
|-------------|---------------------------------|--------|-----|-----|-----|-----|-----|----|------|-------|-------|
| S-SMC-M005 | EC-5 soil moisture Smart Sensor | √ | √ | √ | ◆ | | | | | | |
| S-SMD-M005 | 10HS soil moisture Smart Sensor | √ | √ | √ | ◆ | | | | | | |

Leaf Wetness

| Part number | Type | RX3000 | U30 | H21 | H22 | U12 | U14 | ZW | UX90 | UX100 | UX120 |
|-------------|---------------------------|--------|-----|-----|-----|-----|-----|----|------|-------|-------|
| S-LWA-M003 | Leaf wetness Smart Sensor | √ | √ | √ | ◆ | | | | | | |

Relative Humidity

| Part number | Type | RX3000 | U30 | H21 | H22 | U12 | U14 | ZW | UX90 | UX100 | UX120 |
|-------------------------|---------------------------------|--------|-----|-----|-----|-----|-----|----|------|-------|-------|
| S-THB-M002 ¹ | 12-bit Temp/RH smart (2m cable) | √ | √ | √ | √ | | √ | | | | |
| S-THB-M008 ¹ | 12-bit Temp/RH smart (8m cable) | √ | √ | √ | √ | | √ | | | | |

◆ This logger is intended for indoor environments, but sensors are compatible.

¹ CE Compliant

◆ This logger is intended for indoor environments, but sensors are compatible.

¹ Note: Temp & RH NIST certification services available for this product. Please visit onsetcomp.com, or call us at 1-800-564-4377.

Accessories

Shuttles/Base Stations

| Part number | Type | H21 | H22 | RG3 | UA | U12 | U14 | U20 | U22 | U23 | U24 | U26 | RX3000 | U30 | UTBI | UX90 | UX100 | UX120 | ZW | MX1102 | MX2001 |
|-------------|------------------------------|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|-----|--------|-----|------|------|-------|-------|----------------|--------|--------|
| U-DT-1 | U-Shuttle data transporter | ✓ | ✓ | | | ✓ | | | | | | | | | | | ✓ | ✓ | ✓ ¹ | | |
| U-DT-2 | U30 shuttle data transporter | ✓ | ✓ | | | | | | | | | | | ✓ | | | | | | | |
| U-DTW-1 | Waterproof shuttle | | | ✓ | ✓ | | | ✓ | ✓ | ✓ | ✓ | ✓ | | | ✓ | | | | | | |
| BASE-U-1 | Pendant base station | | | | ✓ | ✓ | | | | | | | | | | | | | | | |
| BASE-U-4 | Optic USB base station | | | | ✓ | ✓ | | ✓ | ✓ | ✓ | ✓ | ✓ | | | ✓ | | | | | | |

Computer Interface Cables

| Part number | Type | H21 | H22 | RG3 | UA | U12 | U14 | U20 | U22 | U23 | U24 | U26 | RX3000 | U30 | UTBI | UX90 | UX100 | UX120 | ZW | MX1102 | MX2001 |
|---------------|--|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|-----|--------|-----|------|------|-------|-------|----|--------|--------|
| CABLE-PC-3.5 | Serial interface cable for H-series HOBOS | ✓ | ✓ | | | | | | | | | | | | | | | | | | |
| CABLE-USBMB | USB cable for HOBOS U-Series | | | | | ✓ | ✓ | | | | | | | | | | ✓ | ✓ | ✓ | ✓ | ✓ |
| ADAPT-SER-USB | USB to serial interface cable for H-series HOBOS | ✓ | ✓ | | | | | | | | | | | | | | | | | | |

Water Logger Mounting

| Part number | Type | H21 | H22 | RG3 | UA | U12 | U14 | U20 | U22 | U23 | U24 | U26 | RX3000 | U30 | UTBI | UX90 | UX100 | UX120 | ZW | MX1102 | MX2001 |
|---------------------------|---|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|-----|--------|-----|------|------|-------|-------|----|--------|--------|
| WELL-CAP-01 | 2" (5cm) Well Cap | | | | | | | ✓ | | | ✓ | ✓ | | | | | | | | | ✓ |
| CABLE-DR-5.0 | 5m Direct Read Cable | | | | | | | | | | | | | | | | | | | | ✓ |
| CABLE-DR-010 | 10m Direct Read Cable | | | | | | | | | | | | | | | | | | | | ✓ |
| CABLE-DR-015 | 15m Direct Read Cable | | | | | | | | | | | | | | | | | | | | ✓ |
| CABLE-DR-030 | 30m Direct Read Cable | | | | | | | | | | | | | | | | | | | | ✓ |
| CABLE-DR-060 | 60m Direct Read Cable | | | | | | | | | | | | | | | | | | | | ✓ |
| CABLE-DR-xxx ² | xxxm Custom Length Direct Read Cable ³ | | | | | | | | | | | | | | | | | | | | ✓ |
| SUBC2-xx | For HOBOS U10 and U12 underwater use | | | | | ✓ | | | | | | | | | | | | | | | |
| HOUSING-U2X | Protective Housing | | | | | | | ✓ | | | ✓ | | | | | | | | | | |

Replacement Batteries

| Part number | Type | H21 | H22 | RG3 | UA | U12 | U14 | U20 | U22 | U23 | U24 | U26 | RX3000 | U30 | UTBI | UX90 | UX100 | UX120 | ZW | MX1102 | MX2001 |
|--------------|-----------------------------------|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|-----|--------|-----|------|------|-------|-------|----|--------|--------|
| HRB-TEMP-1 | Lithium batteries (box of 5) | | | | ✓ | ✓ | | | | | | | | | | | ✓ | ✓ | | | |
| HRB-U30-S100 | 10 Ahr battery w/cable | | | | | | | | | | | | ✓ | ✓ | | | | | | | |
| HP-B | Replacement battery for HOBOS U23 | | | | | | | | | ✓ | | | | | | | | | | | |

For factory battery replacement and calibration services, please call 1-508-759-9500 or 1-800-LOGGERS

Replacement Couplers

| Part number | Type | H21 | H22 | RG3 | UA | U12 | U14 | U20 | U22 | U23 | U24 | U26 | RX3000 | U30 | UTBI | UX90 | UX100 | UX120 | ZW | MX1102 | MX2001 |
|-------------|--|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|-----|--------|-----|------|------|-------|-------|----|--------|--------|
| COUPLER-UA | Coupler (for use with BASE-U-4) ¹ | | | | ✓ | | | | | | | | | | | | | | | | |
| COUPLER2-A | Coupler (for use with BASE-U-4) | | | | ✓ | | | | | | | | | | | | | | | | |
| COUPLER2-B | Coupler (for use with BASE-U-4) | | | | | | | ✓ | | | | | | | | | | | | | |
| COUPLER2-C | Coupler (for use with BASE-U-4) | | | | | | | | ✓ | | ✓ | ✓ | | | | | | | | | |
| COUPLER2-D | Coupler (for use with BASE-U-4) | | | | | | | | | | | | | | ✓ | | | | | | |
| COUPLER2-E | Coupler (for use with BASE-U-4) | | | | | | | | | ✓ | | | | | | | | | | | |

Subminiature Connectors

| Part number | Type | H21 | H22 | RG3 | UA | U12 | U14 | U20 | U22 | U23 | U24 | U26 | RX3000 | U30 | UTBI | UX90 | UX100 | UX120 | ZW | MX1102 | MX2001 |
|-------------|-----------------|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|-----|--------|-----|------|------|-------|-------|----|--------|--------|
| SMC-J | For type J wire | | | | | | | | | | | | | | | | ✓ | ✓ | | | |
| SMC-K | For type K wire | | | | | | | | | | | | | | | | ✓ | ✓ | | | |
| SMC-T | For type T wire | | | | | | | | | | | | | | | | ✓ | ✓ | | | |

¹ Not compatible with UX120-006M

² xxx is cable length in meters, ranging from 0.2m to 500m; cable length increments are larger for longer lengths

Additional Accessories

| Part number | Type | H21 | H22 | RG3 | UA | U12 | U14 | U20 | U22 | U23 | U24 | U26 | RX3000 | U30 | UTBI | UX90 | UX100 | UX120 | ZW | MX1102 | MX2001 |
|-------------------|---|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|-----|--------|-----|------|------|-------|-------|----|--------|--------|
| T-VER-AH02 | Single phase fuse kit (for T-VER-E50B2 only) | | | | | | | | | | | | | | | | | | | | |
| A-E50B2-LEADSET | Wiring kit (for T-VER-E50B2 only) | | | | | | | | | | | | | | | | | | | | |
| A-WNB-LEADSET | Voltage input lead set with alligator clips | | ✓ | ✓ | | | | | | | | | ✓ | ✓ | | ✓ | | ✓ | ✓ | | |
| BOOT-BLK | Protective boot, black (cap included) | | | | | | | | ✓ | | | | | | | | | | | | |
| BOOT-WHT | Protective boot, white (cap included) | | | | | | | | ✓ | | | | | | | | | | | | |
| 85-CAPLUG-H20-B | Replacement cap for protective boot, black | | | | | | | | ✓ | | | | | | | | | | | | |
| 85-CAPLUG-H20-W | Replacement cap for protective boot, white | | | | | | | | ✓ | | | | | | | | | | | | |
| BOOT-TIDBIT-BK | Protective boot, black (5 ea) | | | | | | | | | | | | | | ✓ | | | | | | |
| BOOT-TIDBIT-WH | Protective boot, white (5 ea) | | | | | | | | | | | | | | ✓ | | | | | | |
| U20-CASE-1 | Carrying case | | | | | | | ✓ | | | | | | | | | | | | | |
| CABLE-1-50 | Teflon coated SS cable (50 ft) | | | | | | | ✓ | | | ✓ | ✓ | | | | | | | | | |
| CABLE-1-300 | Teflon coated SS cable (300 ft) | | | | | | | ✓ | | | ✓ | ✓ | | | | | | | | | |
| CABLE-1-CRIMP | Crimp sleeve (12 ea) for above cables | | | | | | | ✓ | | | ✓ | ✓ | | | | | | | | | |
| SOLAR-3W | 3 watt, 6 volt solar panel | | | | | | | | | | | | ✓ | ✓ | | | | | | | |
| SOLAR-6W | 6 watt, 6 volt solar panel | | | | | | | | | | | | ✓ | ✓ | | | | | | | |
| AC-U30 | AC power adapter for the U30 (AC-U30-EU) | | | | | | | | | | | | ✓ | ✓ | | | | | | | |
| RS1 | Solar radiation shield | | | | ✓ | | | ✓ | ✓ | | | | | | ✓ | | | | | | |
| M-RSA | Solar radiation shield (assembled) | | | | ✓ | | | ✓ | ✓ | | | | | | ✓ | | | | | | |
| RS3 | Solar radiation shield | | | | | | | | ✓ | | | | | | | | | | | | |
| U23-RS-CLAMPKIT | Mounting clamp (2 required) | | | | | | | | | ✓ | | | | | | | | | | | |
| UX90-LIGHT-PIPE-1 | 1-foot fiber optic attachment for HOBO UX90 | | | | | | | | | | | | | | | ✓ | | | | | |
| CASE-PELICAN-1510 | Pelican case- durable, watertight, FAA carry-on | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | |
| CASE-4X-2 | Protective, weather-resistant case | | | | | | | | | | | | | | | ✓ | | ✓ | | | |

Additional Replacement Parts

| Part number | Type | H21 | H22 | RG3 | UA | U12 | U14 | U20 | U22 | U23 | U24 | U26 | RX3000 | U30 | UTBI | UX90 | UX100 | UX120 | ZW | MX1102 | MX2001 |
|-----------------|---------------------------------------|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|-----|--------|-----|------|------|-------|-------|----|--------|--------|
| MX2001-TOP | HOBO MX Water level logger Top End | | | | | | | | | | | | | | | | | | | | ✓ |
| MX2001-04-S | MX Water Level Sensor End, 4m(13') | | | | | | | | | | | | | | | | | | | | ✓ |
| MX2001-01-S | MX Water Level Sensor End, 9m(30') | | | | | | | | | | | | | | | | | | | | ✓ |
| MX2001-02-S | MX Water Level Sensor End, 30m(100') | | | | | | | | | | | | | | | | | | | | ✓ |
| MX2001-03-S | MX Water Level Sensor End, 76m(250') | | | | | | | | | | | | | | | | | | | | ✓ |
| MX2001-04-Ti-S | MX Water Level Sensor End, 4m(13') | | | | | | | | | | | | | | | | | | | | ✓ |
| MX2001-01-Ti-S | MX Water Level Sensor End, 9m(30') | | | | | | | | | | | | | | | | | | | | ✓ |
| U12-015-ORING-E | O-ring kit (EPDM) | | | | | ✓ | | | | | | | | | | | | | | | |
| U12-015-ORING-V | O-ring kit (Viton) | | | | | | | | | | | | | | | | | | | | |
| H8X4-BK | Replacement parts kit | | | | ✓ | | | | | | | | | | | | | | | | |
| HUM-RHPCB-1 | RH sensor | | | | | | | | ✓ | | | | | | | | | | | | |
| HUM-RHPCB-2 | RH sensor (includes S-THB) | | | | | | | | ✓ | | | | | | | | ✓ | | ✓ | | |
| HUM-RHPCB-3 | RH sensor (for serial #s < 9847173) | | | | | ✓ | | | | | | | | | | | | | | | |
| HUM-RHPCB-3A | RH sensor (for serial #s > 9847173) | | | | | ✓ | | | | | | | | | | | ✓ | | | | |
| DESICCANT1 | Desiccant (25 ea) for UA & U23 | | | | ✓ | | | | ✓ | | | | | | | | | | | | |
| DESICCANT2 | Desiccant (25 ea) submersible cases | | | | | | | | | | | | | | | | | | | | |
| DESICCANT5 | Desiccant (25 ea) for UA-003-64 | | | | ✓ | | | | | | | | | | | | | | | | |
| DESIC-PACK | Desiccant (2 ea) for U12-008 | | | | | ✓ | | | | | | | | | | | | | | | |
| 85-DESICCANT6 | Desiccant pack for HOBO Micro Station | | ✓ | | | | | | | | | | | | | | | | | | |
| UA-PARTSKIT | Parts kit for UA loggers | | | | ✓ | | | | | | | | | | | | | | | | |
| HUM-RHCAP2 | RH cap kit (5 ea) (includes S-THB)) | | | | | | | | ✓ | | | | | | | | | | | | |
| CABLE-TEMP/RH | Sensor cable for ZW loggers | | | | | | | | | | | | | | | | | | ✓ | | |
| CABLE-U23-002 | Sensor cable | | | | | | | | ✓ | | | | | | | | | | | | |
| U26-RDOB-1 | Replacement DO Sensor Cap | | | | | | | | | | | ✓ | | | | | | | | | |

NIST Certification

| Part number | Type | H21 | H22 | RG3 | UA | U12 | U14 | U20 | U22 | U23 | U24 | U26 | RX3000 | U30 | UTBI | UX90 | UX100 | UX120 | ZW | MX1102 | MX2001 |
|----------------------|--------------------------------------|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|-----|--------|-----|------|------|-------|-------|----|--------|--------|
| Temp only | | | | | | | | | | | | | | | | | | | | | |
| NIST-SETUP | NIST traceable setup/logger | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | | | | ✓ | | ✓ | ✓ | ✓ | | |
| NIST-TEMP-POINT | NIST per-point/channel | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | | | | | ✓ | | ✓ | ✓ | ✓ | | |
| Temp & RH | | | | | | | | | | | | | | | | | | | | | |
| RH-NIST-ONEPOINT | One degree Temp & RH certification | | | | | ✓ | ✓ | | | ✓ | | | | | | | ✓ | | | ✓ | |
| RH-NIST-THREEPOINT | Three degree Temp & RH certification | | | | | ✓ | ✓ | | | ✓ | | | | | | | ✓ | | | ✓ | |

Data Shuttles/Base Stations



HOBOT U-Shuttle
U-DT-1¹

The HOBOT U-Shuttle data transporter provides convenient in-field data offload and relaunch of HOBOT U-series loggers and HOBOT Weather Stations, Micro Stations, and HOBOT Energy Logger systems.

Key Advantages:

- Enables convenient, easy data offload from HOBOT U-Series, H21 and H22 data loggers and UX² data loggers (Base Station required for Optic USB loggers)
- Provides safe transport of data back to a computer
- Stores data from multiple data loggers
- Displays logger status, including memory, battery level, and sensor readings for some sensors (on some models)
- CABLE-HOBOT-SHTL and CABLE-USBMB included



HOBOT U30 Shuttle
U-DT-2¹

The HOBOT U-DT-2 U30 Shuttle data transporter provides convenient in-field data offload and relaunch of HOBOT U30 NRC systems and HOBOT Weather Stations (H21), Micro Stations, and HOBOT Energy Logger systems (H22).

Key Advantages:

- Enables convenient, easy data offload from HOBOT U30 Series, H21 and H22 data loggers
- Provides safe transport of data back to a computer
- Stores data from multiple data loggers
- Displays logger status, including memory, battery level, and sensor readings for some sensors
- CABLE-HOBOT-SHTL and CABLE-USBMB included



HOBOT Waterproof Shuttle
U-DTW-1¹

The HOBOT Waterproof Shuttle provides convenient readout and relaunching of underwater and outdoor HOBOT loggers with an Optic USB interface, and is waterproof to 20 meters (66 feet). The HOBOT Waterproof Shuttle can also be used as a Base Station.

Key Advantages:

- Can be used either as a data shuttle or an Optic USB Base Station
- Supports all HOBOT Optic USB loggers
- Outdoor or underwater data readout
- Convenient direct USB connection to host computer
- Waterproof to 20 meters
- Checks and indicates its own battery status



HOBOT Base Station
BASE-U-4¹

The HOBOT Optic USB Base Station and a series of couplers are used to offload data from any HOBOT data logger with an Optic USB interface. The Optic USB Base Station connects to your computer via USB, while connecting to the logger via an appropriate coupler.

Key Advantages:

- Provides fast optical infrared (IR) communications for easy launch and readout of all HOBOT Optic USB loggers
- Splash-resistant

¹ CE Compliant

² Not compatible with UX120-006M

Data Shuttles/Base Stations



Pendant Base Station
BASE-U-1¹

The Pendant Base Station and Coupler provide fast optical infrared (IR) communication for easy logger launch and readout of HOBO Pendant loggers. The Base Station connects via USB to a host computer, while the coupler attaches the logger to the Base Station for communications.

Key Advantages:

- Provides fast optical communications for easy launch and readout of all HOBO Pendant loggers
- Connects via USB cable to host computer
- Splash-resistant

HOBO Shuttle and Base Station Compatibility

| | | U-Shuttle Data Transporter U-DT-1 ¹ | U30 Shuttle Data Transporter U-DT-2 ¹ | Waterproof Shuttle U-DTW-1* ¹ | Pendant Base Station BASE-U-1 ¹ | Optic USB Base Station BASE-U-4* ¹ |
|---------------------|-----------------------|--|--|--|--|---|
| Storage Capacity | 504 loggers/8k memory | √ | | | | |
| | 63 loggers/64k memory | √ | | √ | | |
| | 7 loggers/512k memory | √ | √ | | | |
| HOBO UX90 | | √ | | | | |
| HOBO UX100 | | √ | | | | |
| HOBO UX120 | | √ ² | | | | |
| HOBO U12 | | √ | | | | |
| HOBO U24 | | √B | | √ | | √ |
| HOBO U26 | | √B | | √ | | √ |
| HOBO Pendant | | √B | | √ | √ | √ |
| HOBO U20 | | √B | | √ | | √ |
| HOBO U22 | | √B | | √ | | √ |
| HOBO U23 | | √B | | √ | | √ |
| UTBI TidbiT Temp V2 | | √B | | √ | | √ |
| RG3 Rain Gauge | | √B | | √ | √ | √ |
| HOBO H21 | | √ | √ | | | |
| HOBO H22 | | √ | √ | | | |
| HOBO U30 | | | √ | | | |

*Couplers are included

Products with a "√B" require a Base Station for use with the U-Shuttle.

¹ CE Compliant

The Onset Advantage

Responsiveness

Your projects have tight deadlines that your monitoring partner must be able to meet. Onset offers a highly responsive, dynamic manufacturing environment where we build and ship all our products directly from our headquarters on Cape Cod. Our centralized operations and large capacity enable us to provide fast turnaround to meet your tight project deadlines. Most orders ship within 24 hours.




Reliable, Accurate Data

No matter what your application involves, at the end of the day it all comes down to the integrity of your data. HOBOs, which have become a generic name for data loggers in many markets, are known for providing the most reliable, accurate energy and environmental data under some of the world's toughest environmental conditions.



Simple & Cost-Effective

At Onset, we realize that the technology skill set of our customers and their technology budgets can vary widely. For this reason, our products are designed from the ground up with ease-of-use and affordability in mind.

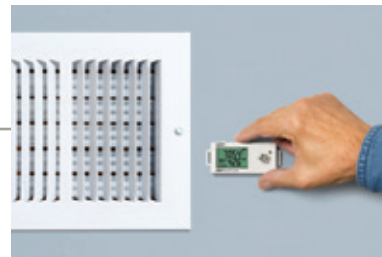

Applications Expertise

With more than three decades of experience in solving data logging applications, Onset has developed an applications expertise that is second to none. Whether you are measuring building energy performance or studying water and field ecology, chances are we have seen your application before and know what it takes to solve it.



World Class Support

Many of our new customers are surprised to find that when they call Onset, a live person answers the phone. Our world-class technical service department is staffed by friendly, knowledgeable people who listen carefully to your questions and guide you through any challenges that arise. Unlike many technology companies, Onset offers free technical support for the life cycle of your purchase.



"Temperature and relative humidity monitoring is critical to the preservation of our records. Traditional data loggers would have provided the data we needed, but we didn't want to spend a lot of time manually retrieving the data throughout the building."

The wireless data nodes are helping us make sure that our archives are getting the best protection possible."

Harold Stoehr
Network Administrator
Washington State Archives

About Onset

Onset is a leading supplier of data loggers. Our HOBO data loggers and weather stations are used around the world in a broad range of monitoring applications, from verifying the performance of green buildings and renewable energy systems to agricultural and coastal research.

Based on Cape Cod, Massachusetts, Onset has been designing and manufacturing its HOBO data loggers on site since the company's founding in 1981.



Onset headquarters, Cape Cod, MA

Go to onsetcomp.com to browse our white papers, application stories, videos, and webinars

Copyright© 2015 Onset Computer Corporation. All rights reserved. Onset, HOBO, HOBOWare, HOBOLink, Pendant are registered trademarks of Onset Computer Corporation. Other products and brand names may be trademarks or registered trademarks of their respective owners.

Patented technology (U.S. Patent 6,826,664)

MKT1059-1015



onset®
HOBO® Data Loggers

www.onsetcomp.com

